


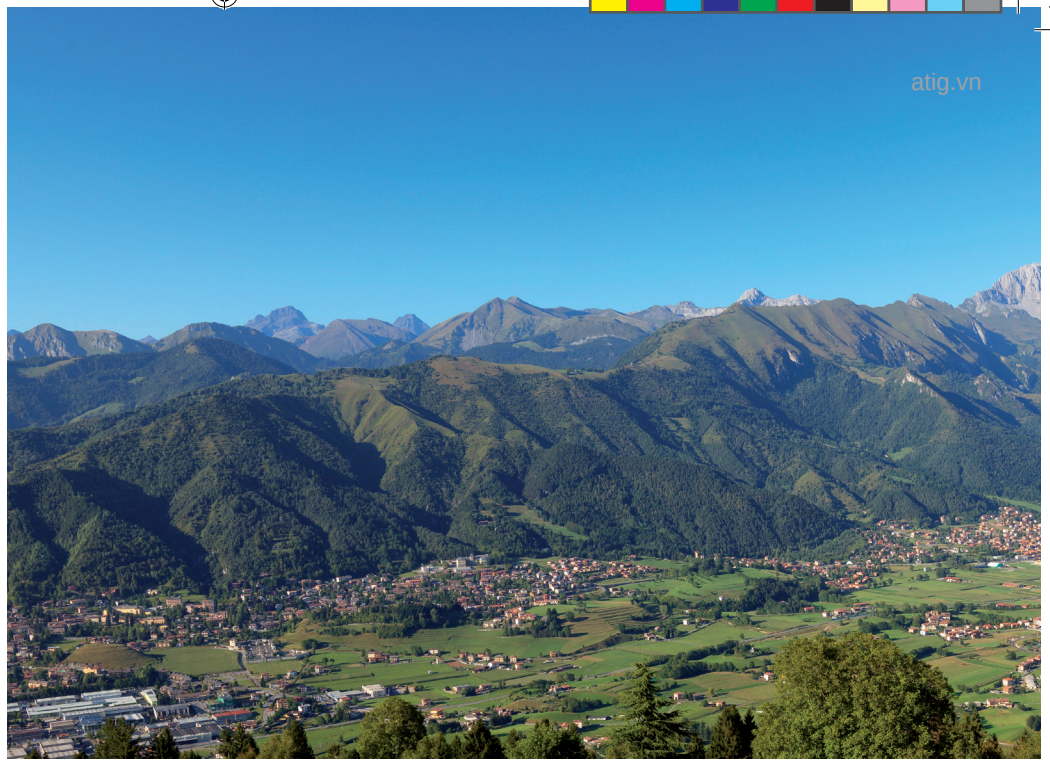

Vị thế quốc tế

Được thành lập vào năm 1956, Comelit Group SpA là một công ty có quy mô hoạt động trên toàn thế giới, chuyên thiết kế và sản xuất các thiết bị chuông hình, video giám sát, cảnh báo đột nhập và hệ thống kiểm soát truy cập.

Comelit hiện có một vị thế quốc tế mạnh mẽ nhờ sự phát triển bền vững với nơi công ty được thành lập và những thành phố khác trên thế giới mà Comelit hiện đang đặt trụ sở.

Một tập đoàn toàn cầu

Ngoài trụ sở chính đặt tại Ý, Comelit hiện xuất khẩu đến hơn 70 quốc gia trên thế giới, và 17 chi nhánh tại các khu vực chiến lược mà công ty hoạt động: từ Châu Âu đến Châu Á, và từ Châu Mỹ đến các quốc gia Trung Đông. Comelit mang đến một cấu trúc thương mại liền mạch, kết hợp công nghệ lõi của công ty với những thay đổi linh hoạt để đáp ứng nhu cầu cụ thể của mỗi thị trường.



 **Comelit®**
Passion. Technology. Design.





Công nghệ liên tục cải tiến để trở nên thân thiện với người dùng

Công ty duy trì văn hóa tiến lên phía trước và đổi mới không ngừng thông qua việc đầu tư liên tục vào hệ thống nhân sự và công nghệ. Các giải pháp mới cũng được nghiên cứu phát triển để đảm bảo tính đơn giản nhưng vẫn có hiệu năng tối đa, có thể đóng góp vào việc cải thiện chất lượng cuộc sống hàng ngày của người dùng.

Không ngừng tiến lên phía trước chính là sứ mệnh của Comelit.



Thiết kế theo phong cách hiện đại

Bên cạnh việc đầu tư phát triển công nghệ đáp ứng nhu cầu khách hàng, sản phẩm của Comelit còn được nghiên cứu tỉ mỉ cả về tính thẩm mỹ. Phong cách thiết kế độc đáo kết hợp với chất liệu công nghệ cao mang đến sản phẩm với đường nét và màu sắc đơn giản nhưng không kém phần tinh tế. Nhờ đó, mỗi sản phẩm của Comelit đều truyền tải ý tưởng về một không gian sống đơn giản, hài hòa với xu hướng kiến trúc hiện đại.

DESIGN
MILANO




reddot design award



DESIGN PLUS

powered by: light+building

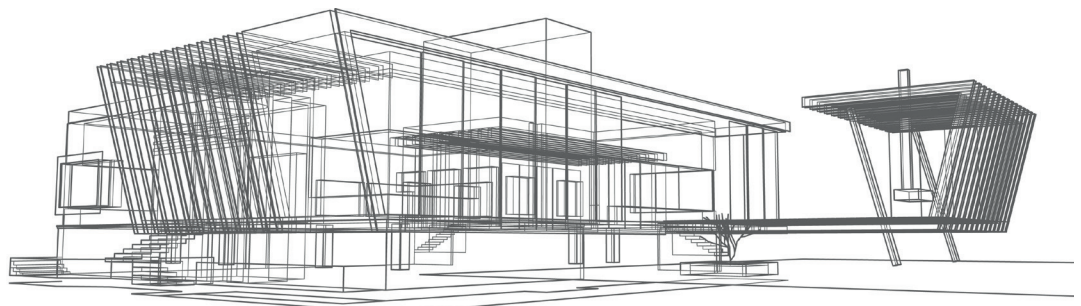



Một hệ thống tích hợp được nhiều thiết bị

Sự phát triển công nghệ vượt bậc của Comelit trong những năm gần đây đã cho phép công ty xây dựng nên nền tảng kết nối hệ thống giúp cho người dùng quản lý và sử dụng nhiều tính năng cùng lúc dù ở nhà hay ở văn phòng

THIẾT BỊ CHUÔNG HÌNH

Công nghệ Simplebus Top 2-wire cùng hệ thống ViP mang đến giải pháp kỹ thuật tốt nhất đáp ứng mọi yêu cầu sử dụng

HỆ THỐNG CẢNH BÁO ĐỘT NHẬP

Một hệ thống hoàn chỉnh có khả năng đáp ứng tất cả các yêu cầu bảo mật với hệ thống kết nối qua dây điện hoặc qua sóng điện từ

CAMERA GIÁM SÁT


Đa dạng phiên bản camera giám sát (analogue, IP và HD sử dụng dây cáp đồng trục)

NHÀ THÔNG MINH

Hệ thống tự động hóa cung cấp người dùng toàn quyền quản lý không gian sống để tạo sự thoải mái mà vẫn tối ưu an ninh

HỆ THỐNG QUẢN LÝ TRUY CẬP

Nhiều mức độ kiểm soát từ cơ bản đến nâng cao với công nghệ Mifare

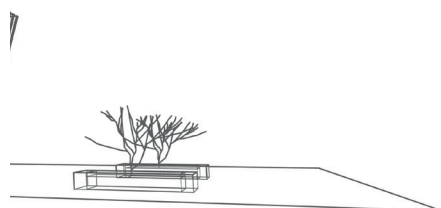


HỆ THỐNG VIP

HỆ THỐNG VIP

MỘT HỆ THỐNG LINH HOẠT TÙY BIẾN CÀI ĐẶT ĐỂ THUẬN TIỆN VỚI NGƯỜI DÙNG


Hệ thống Comelit ViP mang đến công nghệ mới giúp tích hợp các ứng dụng có thể kết nối với chuông hình. Các tùy chỉnh dựa theo dữ liệu cung cấp từ chuông hình có thể được thiết lập để phù hợp với người dùng ở khu vực nhà riêng, chung cư cao cấp, khu thương mại phức hợp, tòa nhà văn phòng hiện đại hay các khu công nghiệp.

Server của Comelit có thể phục vụ không giới hạn người dùng, và cũng không giới hạn khoảng cách giao tiếp. Những gì hệ thống yêu cầu chỉ là một đường truyền duy nhất trên mạng LAN (hoặc hệ thống mạng hiện có mà đang kết nối các thiết bị có sẵn) qua chân cắm RJ45.

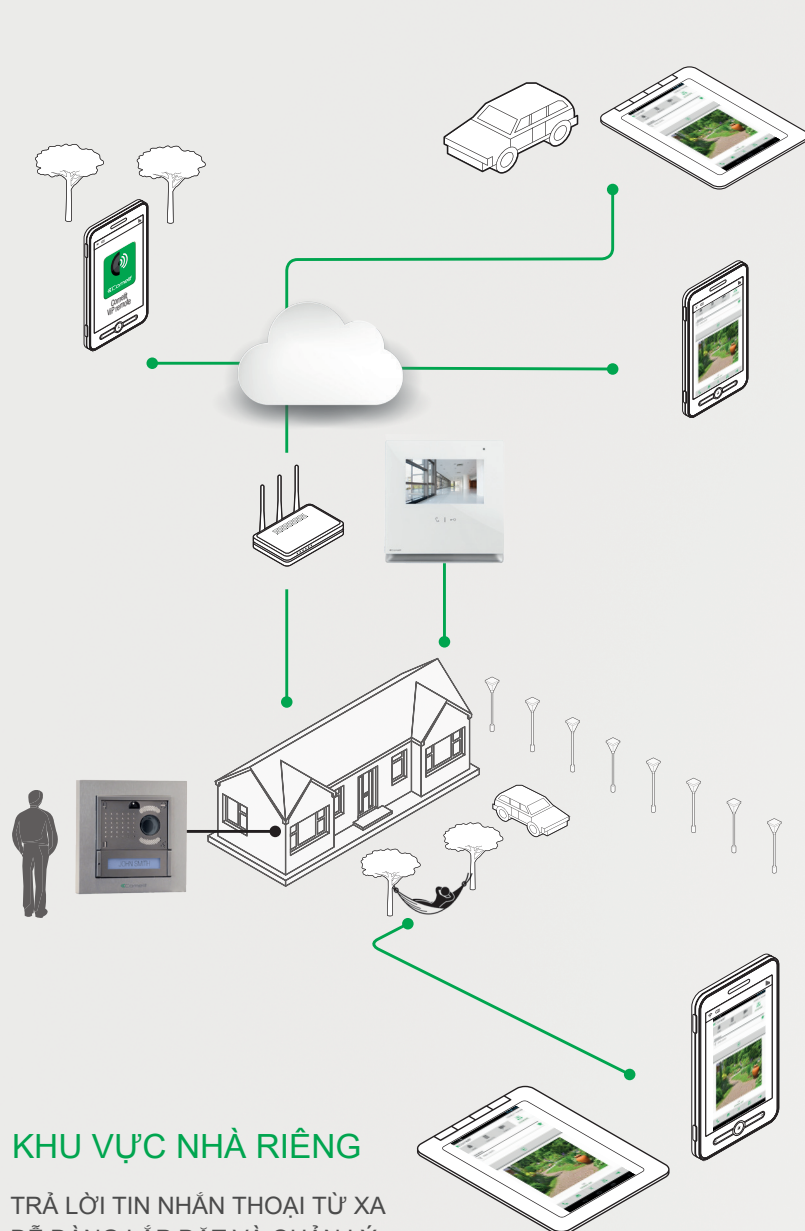

KHU VỰC NHÀ RIÊNG

TRẢ LỜI TIN NHẮN THOẠI TỪ XA
DỄ DÀNG LẮP ĐẶT VÀ QUẢN LÝ
DỄ DÀNG CÀI ĐẶT VÀ THIẾT LẬP
TÍCH HỢP SMARTPHONE HOẶC MÁY TÍNH BẢNG

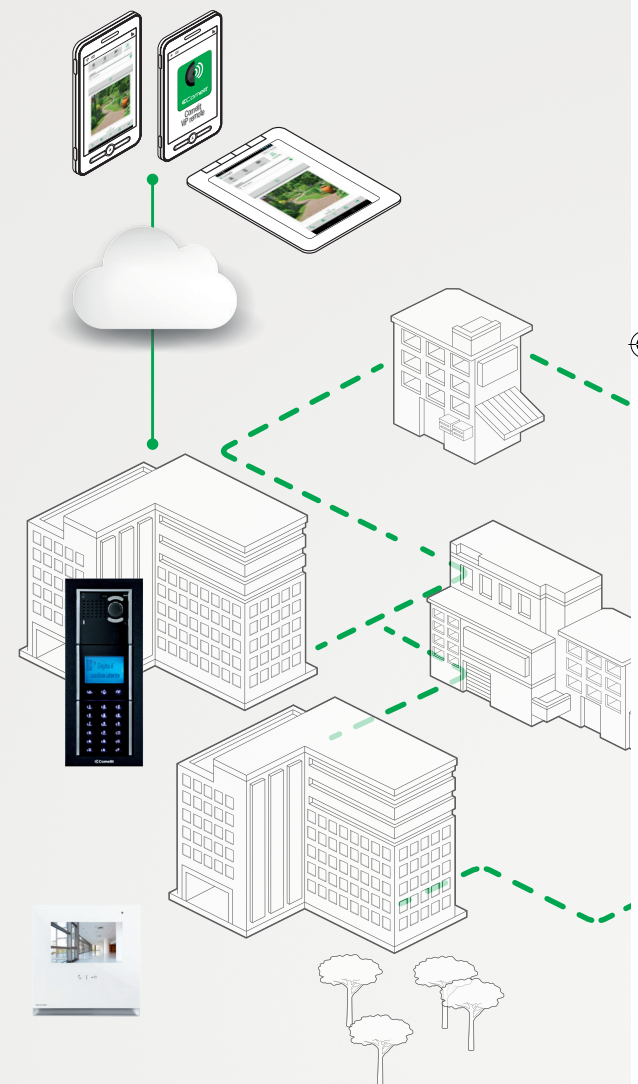

CĂN HỘ CHUNG CƯ

KHÔNG GIỚI HẠN KHOẢNG CÁCH
KHÔNG GIỚI HẠN NGƯỜI DÙNG
HỆ THỐNG KHÔNG LO QUÁ TẢI
HỆ THỐNG MẠNG CÓ THỂ ĐƯỢC MỞ RỘNG
QUẢN LÝ TỪ XA QUA BẢNG ĐIỀU KHIỂN
TRUNG TÂM





KHU VỰC
NHÀ RIÊNG



CĂN HỘ
CHUNG CƯ



ĐƠN VỊ
VĂN PHÒNG

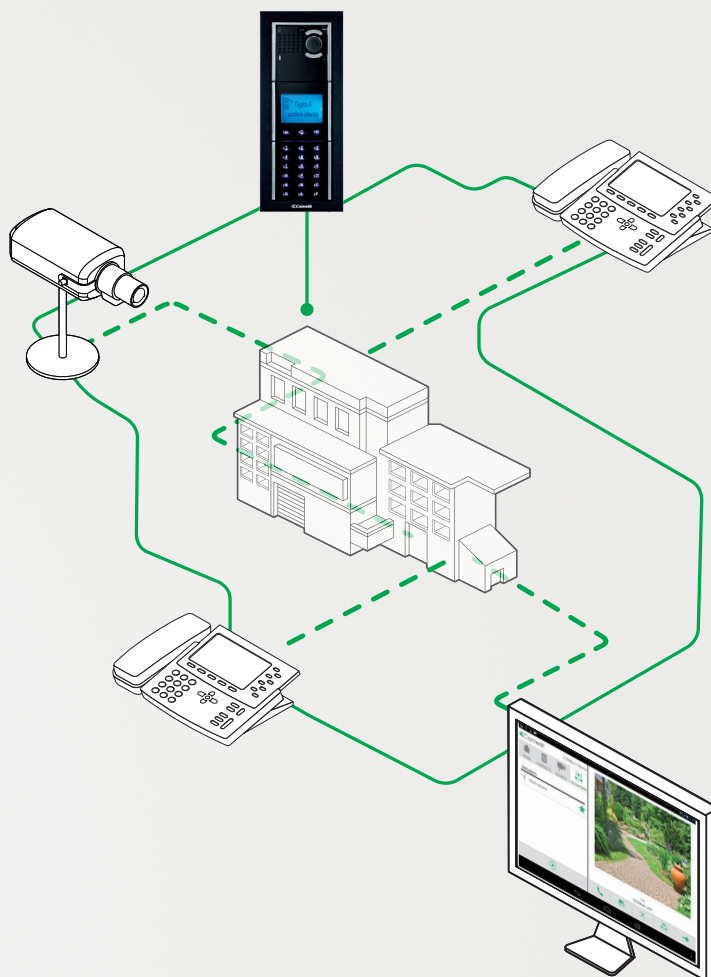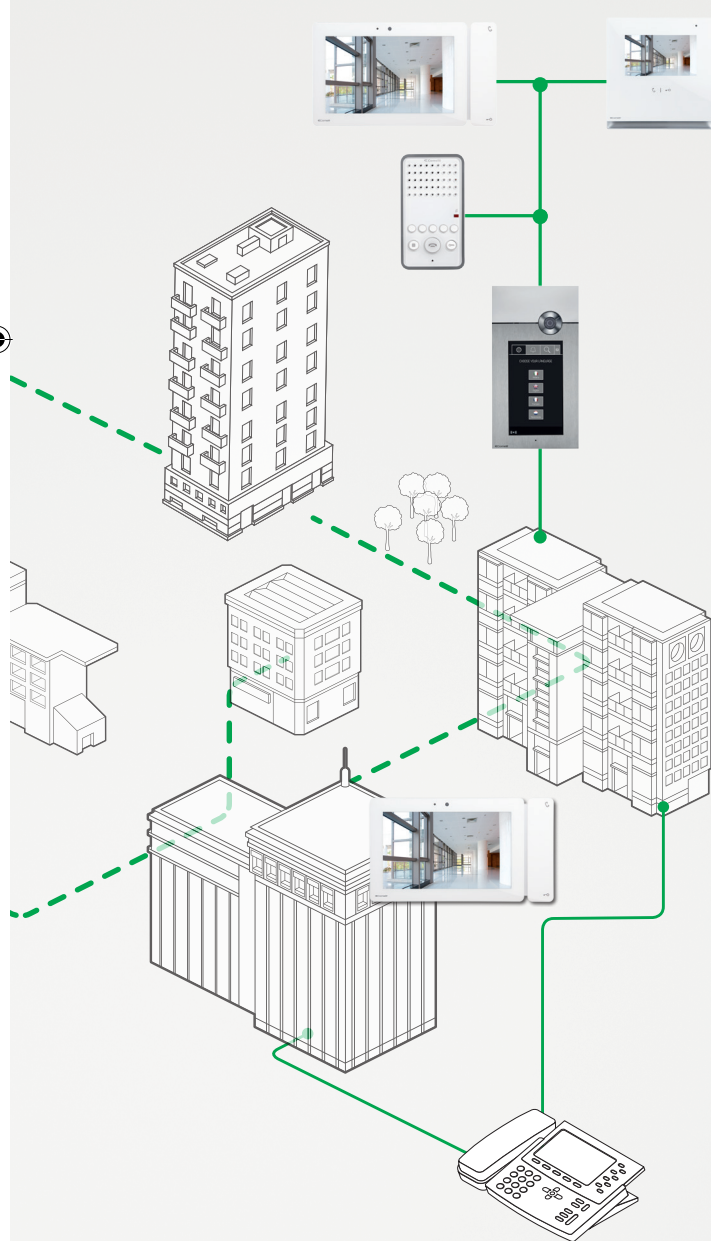


ĐƠN VỊ VĂN PHÒNG

TÍCH HỢP VỚI THIẾT BỊ ĐIỆN THOẠI BÀN
TÍCH HỢP VỚI HỆ THỐNG KIỂM SOÁT TRUY CẬP
TÍCH HỢP VỚI HỆ THỐNG MẠNG HIỆN CÓ
QUẢN LÝ TỪ XA QUA BẢNG ĐIỀU KHIỂN TRUNG TÂM



TÍNH NĂNG CỦA HỆ THỐNG VIP

HỆ THỐNG VIP

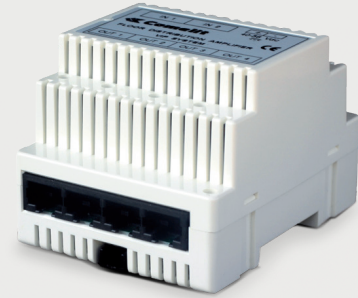

THIẾT BỊ 1456B LÀ MỘT GIẢI PHÁP CHUÔNG HÌNH DÀNH CHO CĂN HỘ CHUNG CƯ

Thiết bị 1456B là một giải pháp chuông hình cung cấp cổng kết nối đa người dùng và được trang bị cho hệ thống Comelit ViP.

Thiết bị có thể sử dụng cho các khu chung cư để cư dân nhận được cuộc gọi thông qua màn hình chào, điện thoại thông minh hoặc máy tính bảng.

CHUÔNG HÌNH VIP



Màn hình chào


Điện thoại
thông minh/
máy tính bảng

Điện thoại bàn


03 LOẠI HỆ THỐNG

Thiết bị 1456B có thể được quản lý theo 03 loại hệ thống: Master, Slave và Phone. Mỗi hệ thống có thể được đăng ký với các gói người dùng khác nhau (1, 10, 50, 100, 200 người dùng) và có thể được mở rộng bất kỳ khi nào cần.


MASTER

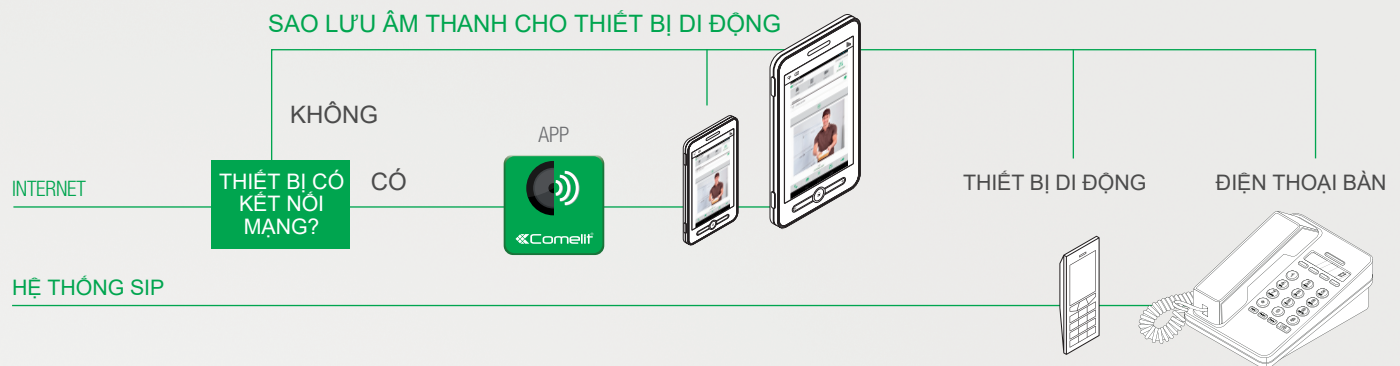

SLAVE

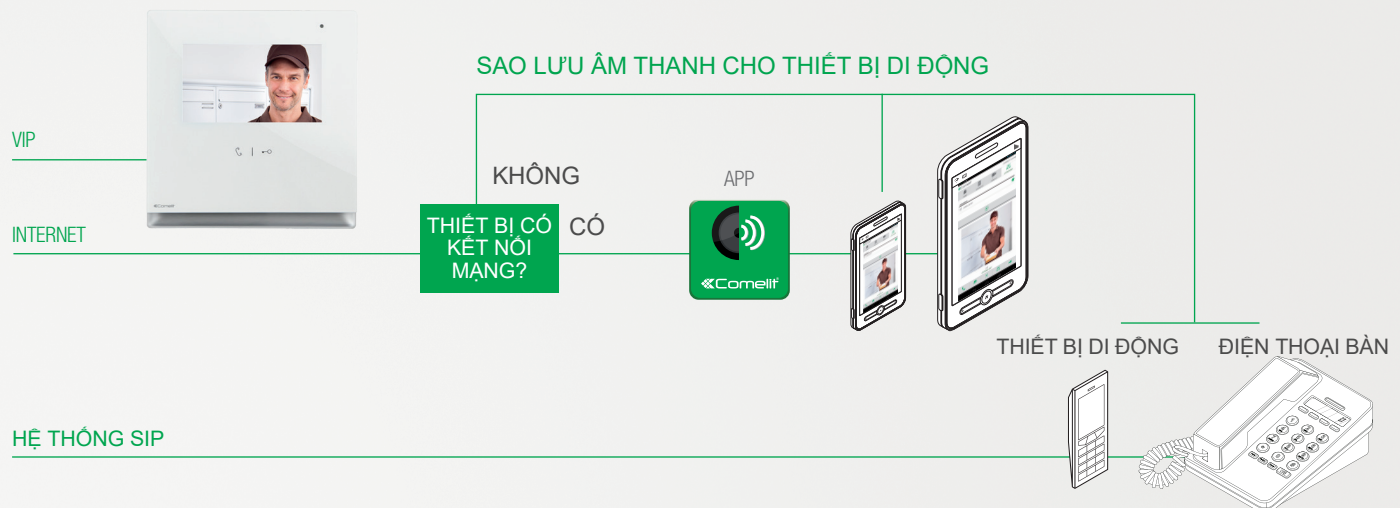

PHONE

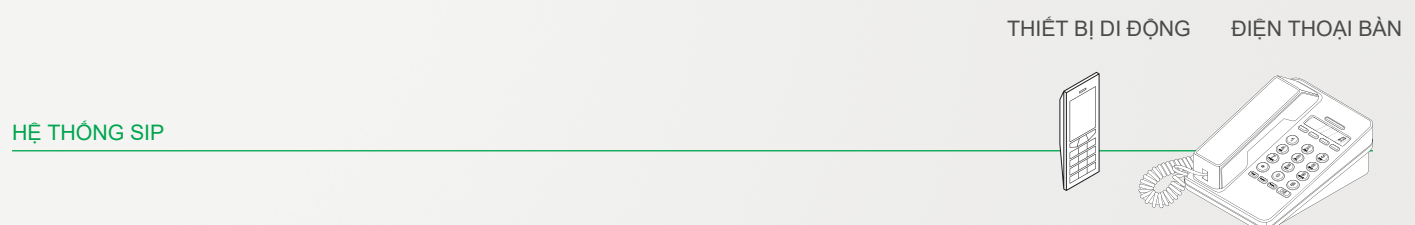


TÍNH NĂNG CỦA HỆ THỐNG VIP

HỆ THỐNG VIP


1456B, THÔNG SỐ KỸ THUẬT

HỆ THỐNG SLAVE

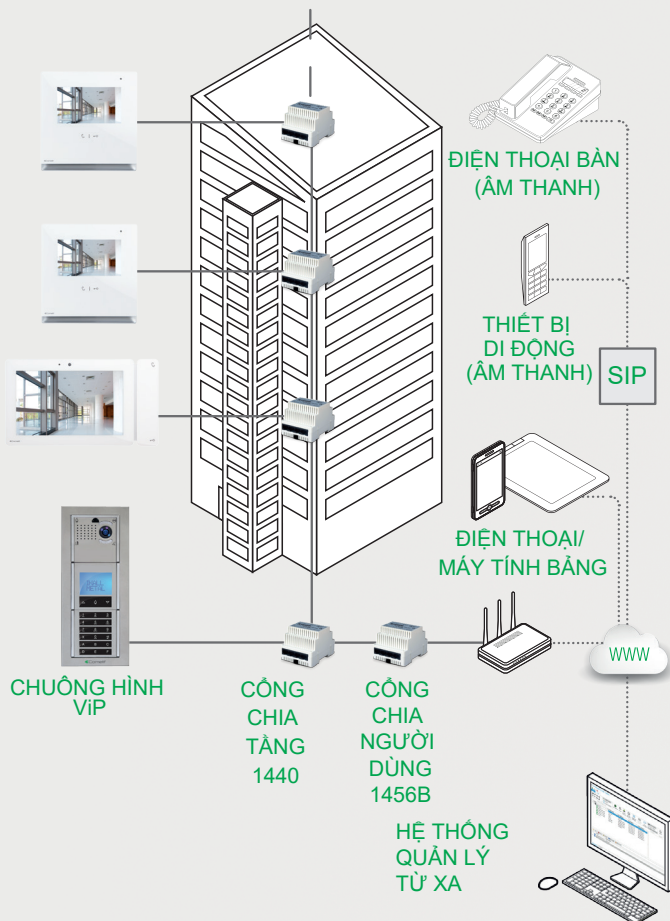

- Trả lời cuộc gọi video từ xa qua điện thoại thông minh
- Trả lời cuộc gọi âm thanh từ điện thoại cố định
- Lưu lại cuộc gọi âm thanh nếu đường truyền không khả dụng
- Kết nối lên đến 15 thiết bị trong mỗi hệ thống (Chuông hình, smartphone, máy tính bảng, điện thoại bàn,...)


HỆ THỐNG MASTER

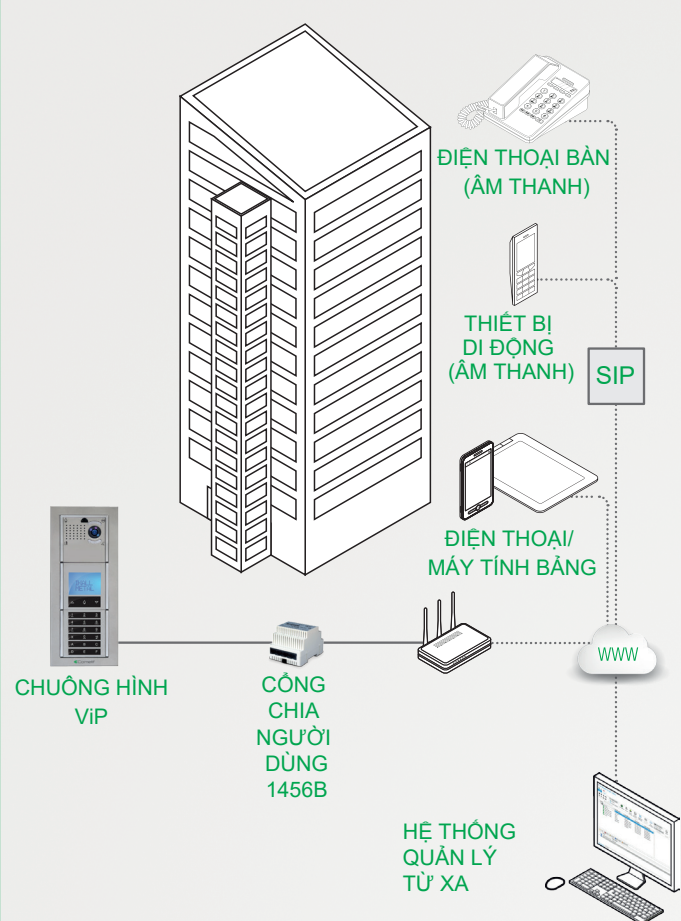

- Trả lời cuộc gọi video từ xa qua điện thoại thông minh
- Trả lời cuộc gọi âm thanh từ điện thoại cố định
- Lưu lại cuộc gọi âm thanh nếu đường truyền không khả dụng
- Kết nối lên đến 15 thiết bị trong mỗi hệ thống (Chuông hình, smartphone, máy tính bảng, điện thoại bàn,...)




HỆ THỐNG PHONE

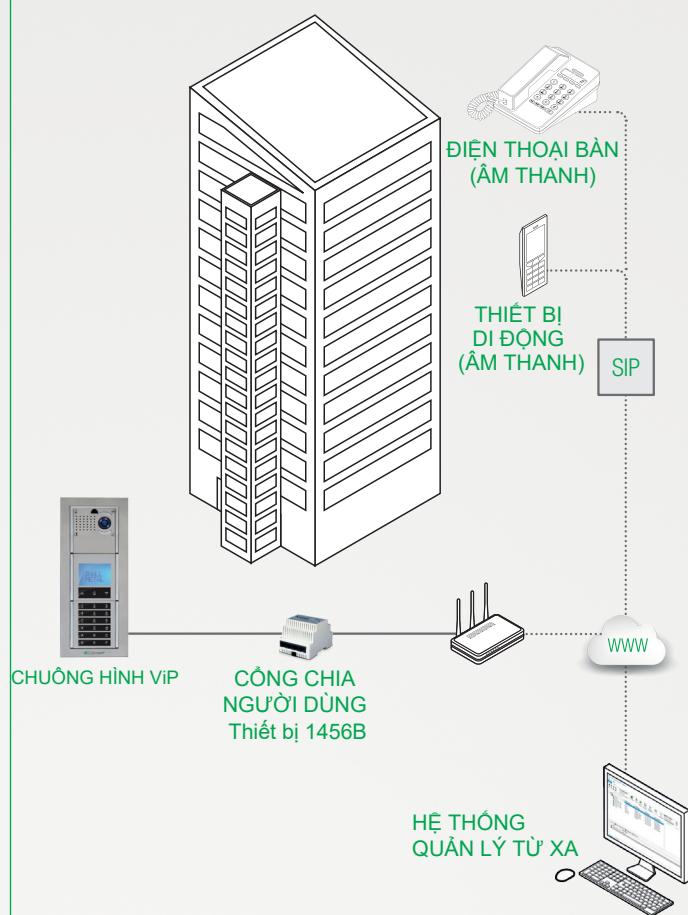


- Cuộc gọi từ chuông hình có thể được trả lời bằng máy bàn hoặc thiết bị di động

ĐẶC ĐIỂM CỦA TỪNG HỆ THỐNG

03 LOẠI HỆ THỐNG, 05 GÓI NGƯỜI DÙNG




MỖI NGƯỜI DÙNG CÓ THỂ KẾT NỐI LÊN TỚI 15 THIẾT BỊ

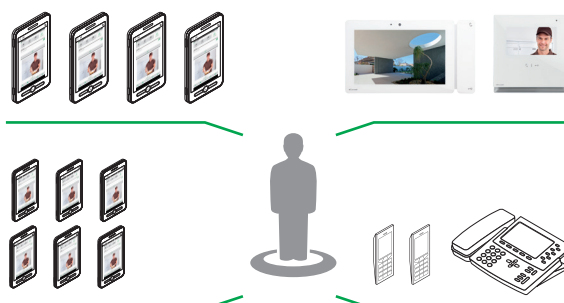

KHẢ NĂNG MỞ RỘNG MẠNG LƯỚI SỬ DỤNG

Mỗi cổng kết nối có thể hoạt động cho lên tới 200 người dùng.

Trong trường hợp số lượng người dùng vượt quá 200 hệ thống sẽ cần nhiều hơn 1 cổng.

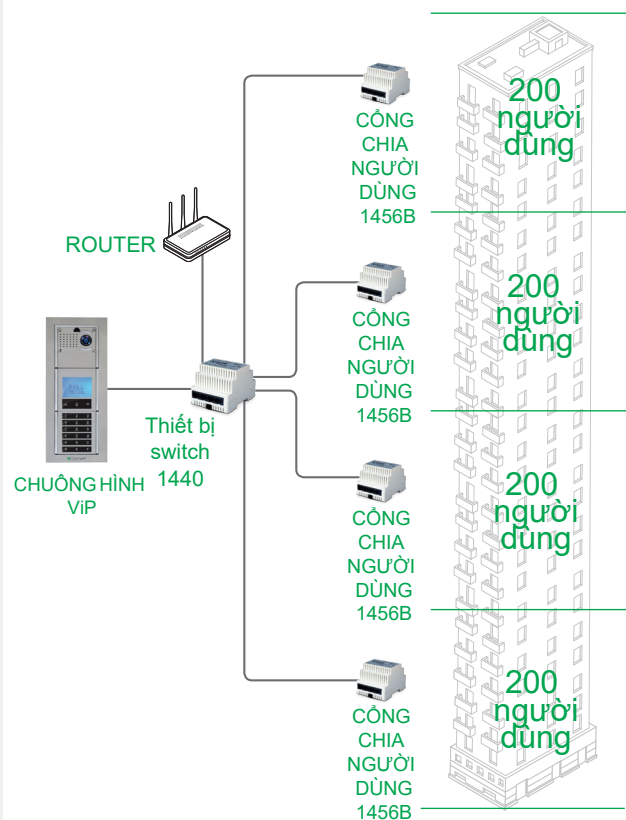

TÍNH NĂNG CỦA HỆ THỐNG VIP

VIP SYSTEM



TRUY CẬP
MÀN HÌNH CHÀO
CỦA BẠN
TỪ BẤT CỨ Đâu

Ứng dụng Comelit cho phép người dùng quản lý cửa và các chức năng nâng cao khác từ bất cứ đâu có dữ liệu mạng di động. Ứng dụng có thể được tải về miễn phí cho điện thoại thông minh và máy tính bảng từ App Store hoặc Google Play




Comelit ViP Remote



Ứng dụng ComelitViP Remote cho phép người dùng:

- Trả lời chuông cửa từ điện thoại di động
- Quản lý qua camera giám sát từ xa
- Nhận các cuộc gọi đến từ chuông hình (đến các số trong danh bạ)
- Điều khiển ánh sáng, cổng, hàng rào,... thông qua thiết bị truyền động
- Xem và lưu lại video từ camera

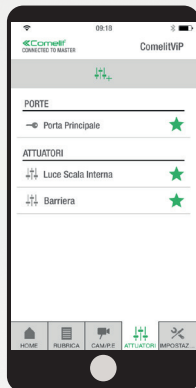

TRẢ LỜI CUỘC GỌI TỪ MÁY TÍNH BÀN



TẤT CẢ CHỨC NĂNG GIÁM SÁT CỬA CHÍNH CÓ THỂ ĐƯỢC QUẢN LÝ VÀ THỰC HIỆN TRÊN MÁY TÍNH BÀN BẰNG PHẦN MỀM PC-INTERCOM.

PHẦN MỀM ĐI KÈM VỚI HỆ THỐNG VÀ ĐƯỢC CÀI ĐẶT THÔNG QUA THẺ NHỚ USB



PC Intercom

TÍNH NĂNG CỦA HỆ THỐNG VIP


HỆ THỐNG VIP

LƯU LẠI CUỘC GỌI

Các cuộc gọi qua chuông đều được máy chủ của hệ thống ViP lưu lại để tăng tính bảo mật cho người dùng.



art. 1459

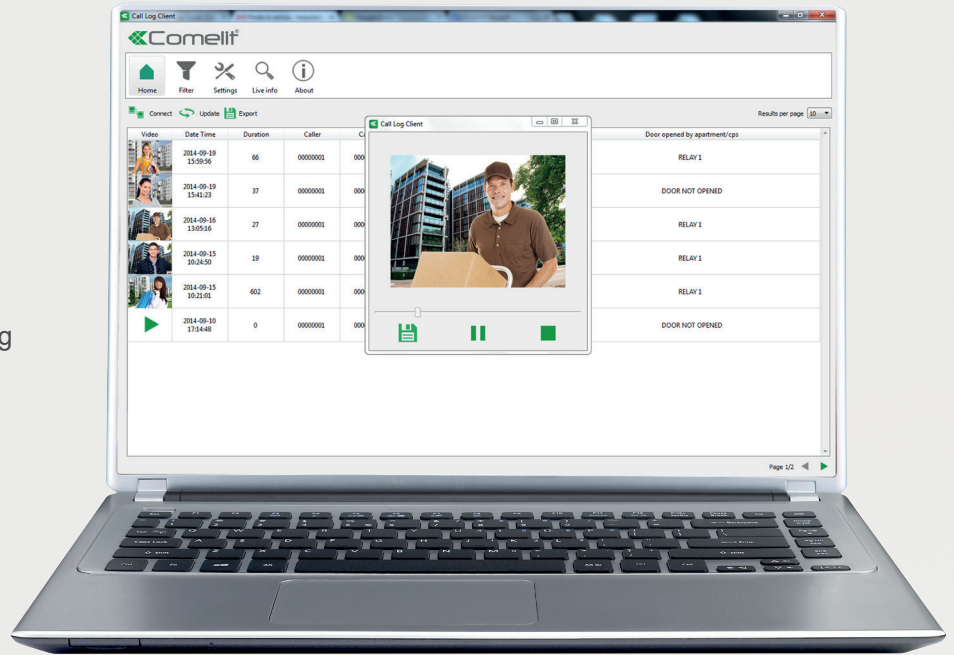

Phần mềm Comelit cho người dùng





CẤU HÌNH HỆ THỐNG

- Thời gian ghi âm cuộc thoại
- Lựa chọn thiết bị để ghi âm
- Thời gian lưu trữ cuộc ghi âm (từ 1 đến 60 ngày)



HỆ THỐNG BẢO MẬT

- Cung cấp mật khẩu đăng nhập phần mềm
- Cung cấp mật khẩu bảo vệ cấu hình hệ thống

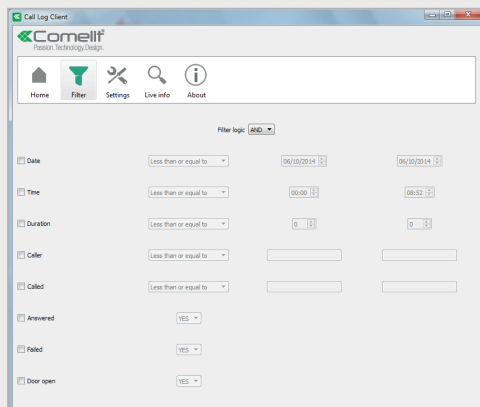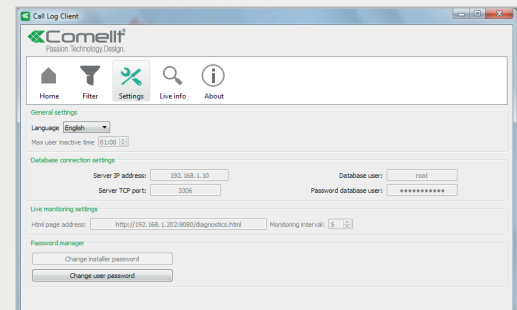

TÍNH NĂNG BỘ LỌC CUỘC GỌI

- Theo ngày
- Theo thời gian
- Cuộc gọi từ ngoài vào
- Cuộc gọi từ trong nhà
- Cuộc gọi đến điện thoại

XUẤT FILE GHI ÂM

Máy chủ cho phép người dùng có thể xuất file cuộc gọi từ kho lưu trữ


PHÁT BẢN GHI ÂM

Người dùng có thể quản lý và nghe lại các bản ghi âm mọi lúc

LƯU TRỮ VIDEO

Máy chủ sẽ lưu lại video cuộc gọi từ chuông hình (người dùng có thể lựa chọn có lưu lại âm thanh hay không)

HỆ THỐNG VIP CUNG CẤP PHẦN MỀM TỔNG ĐÀI QUẢN LÝ DÀNH CHO MÁY TÍNH

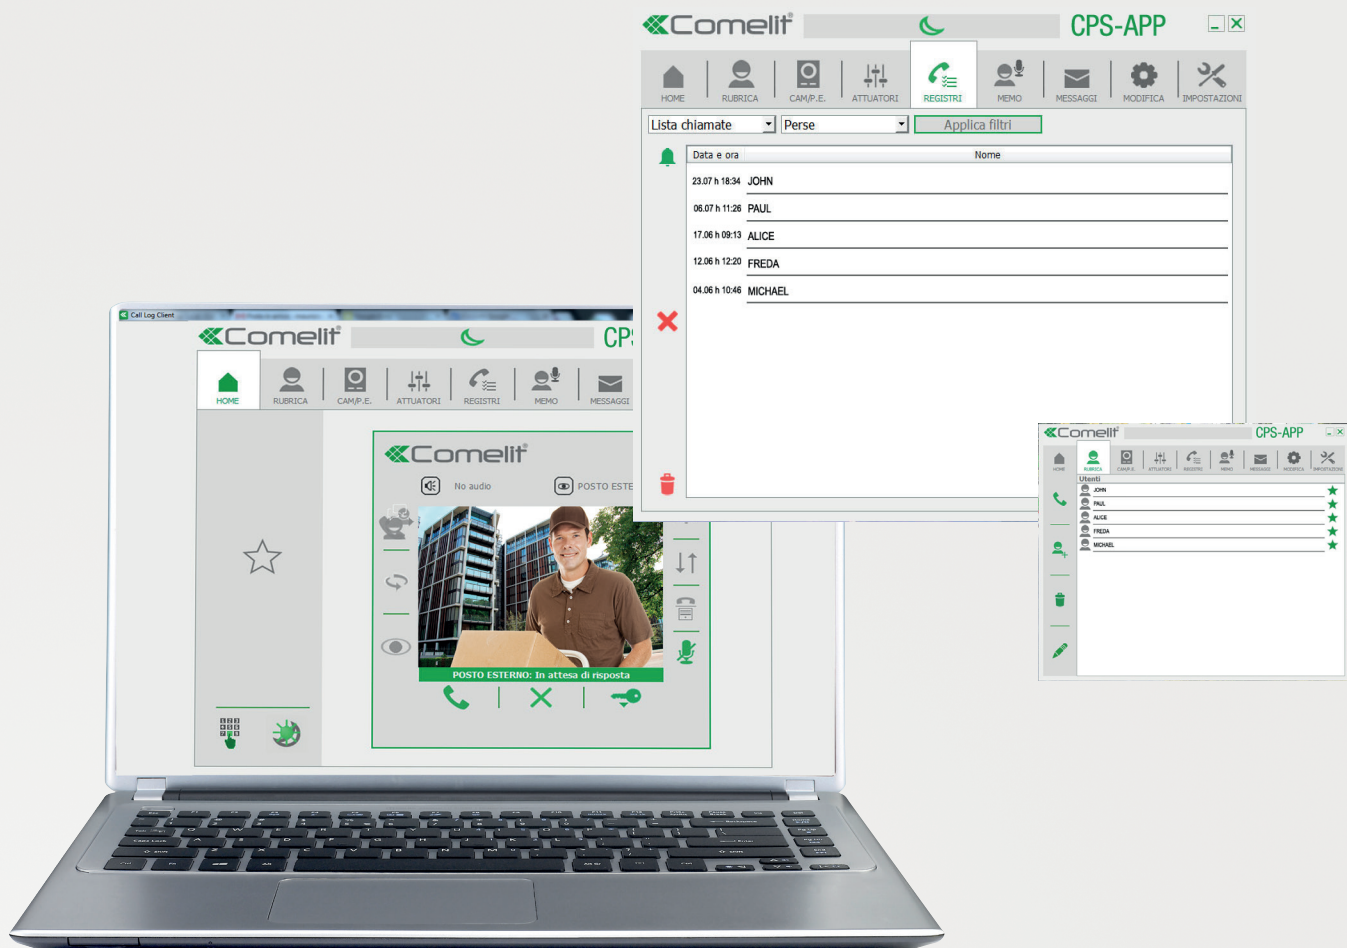

1448

PHẦN MỀM TỔNG ĐÀI QUẢN LÝ DÀNH CHO MÁY TÍNH CỦA HỆ THỐNG VIP

Phần mềm trong USB micro-key giúp đơn giản hóa công việc quản lý và điều khiển các chức năng của bảng điều khiển. Ngoài các chức năng chính trên màn hình chuông cửa, hệ thống VIP cũng cho phép chuyển tiếp các cuộc gọi âm thanh/video cũng như quản lý báo động cho chủ căn hộ.

Hệ thống cũng có một kho lưu trữ bản ghi âm tất cả các cuộc gọi dù là từ ngoài vào hay là từ trong ra. Nó cũng phép khách đến nhà nhận tin từ ngoài vào và tin nhắn đó cũng được lưu trữ. Người dùng hệ thống VIP sẽ được cấp giấy phép và mật khẩu để truy cập phần mềm, và USB phải luôn cắm vào máy tính khi truy cập hệ thống.

TÍNH NĂNG CỦA HỆ THỐNG VIP

HỆ THỐNG VIP

BỘ THIẾT BỊ VIP QUẢN LÝ BẰNG MÀN HÌNH CHUÔNG CỬA ICONA HOẶC APP ĐIỆN THOẠI



Bộ thiết bị ViP cho phép người dùng quản lý thông qua ứng dụng trên điện thoại/máy tính bảng. Thiết bị cổng vào trong bộ sản phẩm cũng cho phép kết nối các thiết bị khác (máy tính bàn) bên cạnh màn hình chuông cửa. Dù quản lý bằng cách nào, cổng chuyển phải được kết nối với thiết bị router ADSL hoặc một thiết bị khác để cung cấp Wifi nội bộ hoặc dữ liệu di động.

Tùy thuộc vào giới hạn băng thông, cổng có thể phân phối lên đến 16 thiết bị (bao gồm màn hình chuông cửa, điện thoại thông minh, máy tính bảng hoặc máy tính bàn) với 4 luồng giám sát đồng thời. Hệ thống cũng cho phép 16 thiết bị đó giao tiếp với nhau.



Comelit ViP Remote

BỘ CHUÔNG HÌNH 8531

CHUÔNG HÌNH, MÀN HÌNH ICONA, ỨNG DỤNG ĐIỆN THOẠI

HỆ THỐNG CHUÔNG QUẢN LÝ QUA ĐIỆN THOẠI



Bộ thiết bị cho phép người dùng kết nối điện thoại cũng như máy tính bảng với chuông hình qua Wifi để quản lý. Tuy nhiên, cổng chuyển phải được kết nối với thiết bị router ADSL hoặc một thiết bị khác để cung cấp Wifi nội bộ hoặc dữ liệu di động để sử dụng tính năng này.

Tùy thuộc vào giới hạn băng thông, cổng có thể phân phối lên đến 16 thiết bị (bao gồm màn hình chuông cửa, điện thoại thông minh, máy tính bảng hoặc máy tính bàn) với 4 luồng giám sát đồng thời. Hệ thống cũng cho phép 16 thiết bị đó giao tiếp với nhau.



Comelit ViP Remote

BỘ CHUÔNG HÌNH 8531HIM

CHUÔNG HÌNH, ỨNG DỤNG ĐIỆN THOẠI

HỆ THỐNG CHUÔNG QUẢN LÝ QUA ĐIỆN THOẠI



Bộ thiết bị cho phép người dùng kết nối điện thoại cũng như máy tính bảng với chuông hình qua Wifi để quản lý. Tuy nhiên, cổng chuyển phải được kết nối với thiết bị router ADSL hoặc một thiết bị khác để cung cấp Wifi nội bộ hoặc dữ liệu di động để sử dụng tính năng này.

Tùy thuộc vào giới hạn băng thông, cổng có thể phân phối lên đến 16 thiết bị (bao gồm màn hình chuông cửa, điện thoại thông minh, máy tính bảng hoặc máy tính bàn) với 4 luồng giám sát đồng thời. Hệ thống cũng cho phép 16 thiết bị đó giao tiếp với nhau.



BỘ CHUÔNG HÌNH 8531

CHUÔNG HÌNH, MÀN HÌNH ICONA, ỨNG DỤNG ĐIỆN THOẠI

BỘ THIẾT BỊ 8522

02 CHUÔNG HÌNH VÀ MÀN HÌNH ICONA

HỆ THỐNG CHUÔNG QUẢN LÝ QUA MÁY TÍNH BÀN



Bộ thiết bị này cho phép người dùng quản lý hệ thống chuông qua mạng LAN.

Người dùng cài đặt hệ thống quản lý lên máy tính/macbook thông qua USB được cung cấp để giao tiếp với các thiết bị khác.

Người dùng sẽ có tài khoản để đăng nhập và chỉ có thể truy cập được khi nhập đúng mã tài khoản.



BỘ CHUÔNG HÌNH 8531HIM

BỘ CHUÔNG GIA ĐÌNH VÀ HỆ THỐNG PC INTERCOM

BỘ THIẾT BỊ 8504H

CHUÔNG HÌNH VÀ HỆ THỐNG QUẢN LÝ PC INTERCOM



ƯU ĐIỂM CỦA HỆ THỐNG VIP

HỆ THỐNG VIP

VỀ HỆ THỐNG MẠNG


Trong hệ thống ViP, tất cả thiết bị đều được kết nối với mạng LAN dù là thiết bị trong hay ngoài nhà

So với công nghệ chuông hình cũ, hệ thống mạng ViP sử dụng giao thức cho phép hệ thống cập nhật hoặc thay đổi cấu hình đơn giản hơn, mang đến sự linh hoạt và thuận tiện cho khách hàng. Việc cài đặt thêm thiết bị, chạy thử hoặc cấu hình lại cũng được thực hiện dễ dàng.



MÀN HÌNH QUẢN LÝ



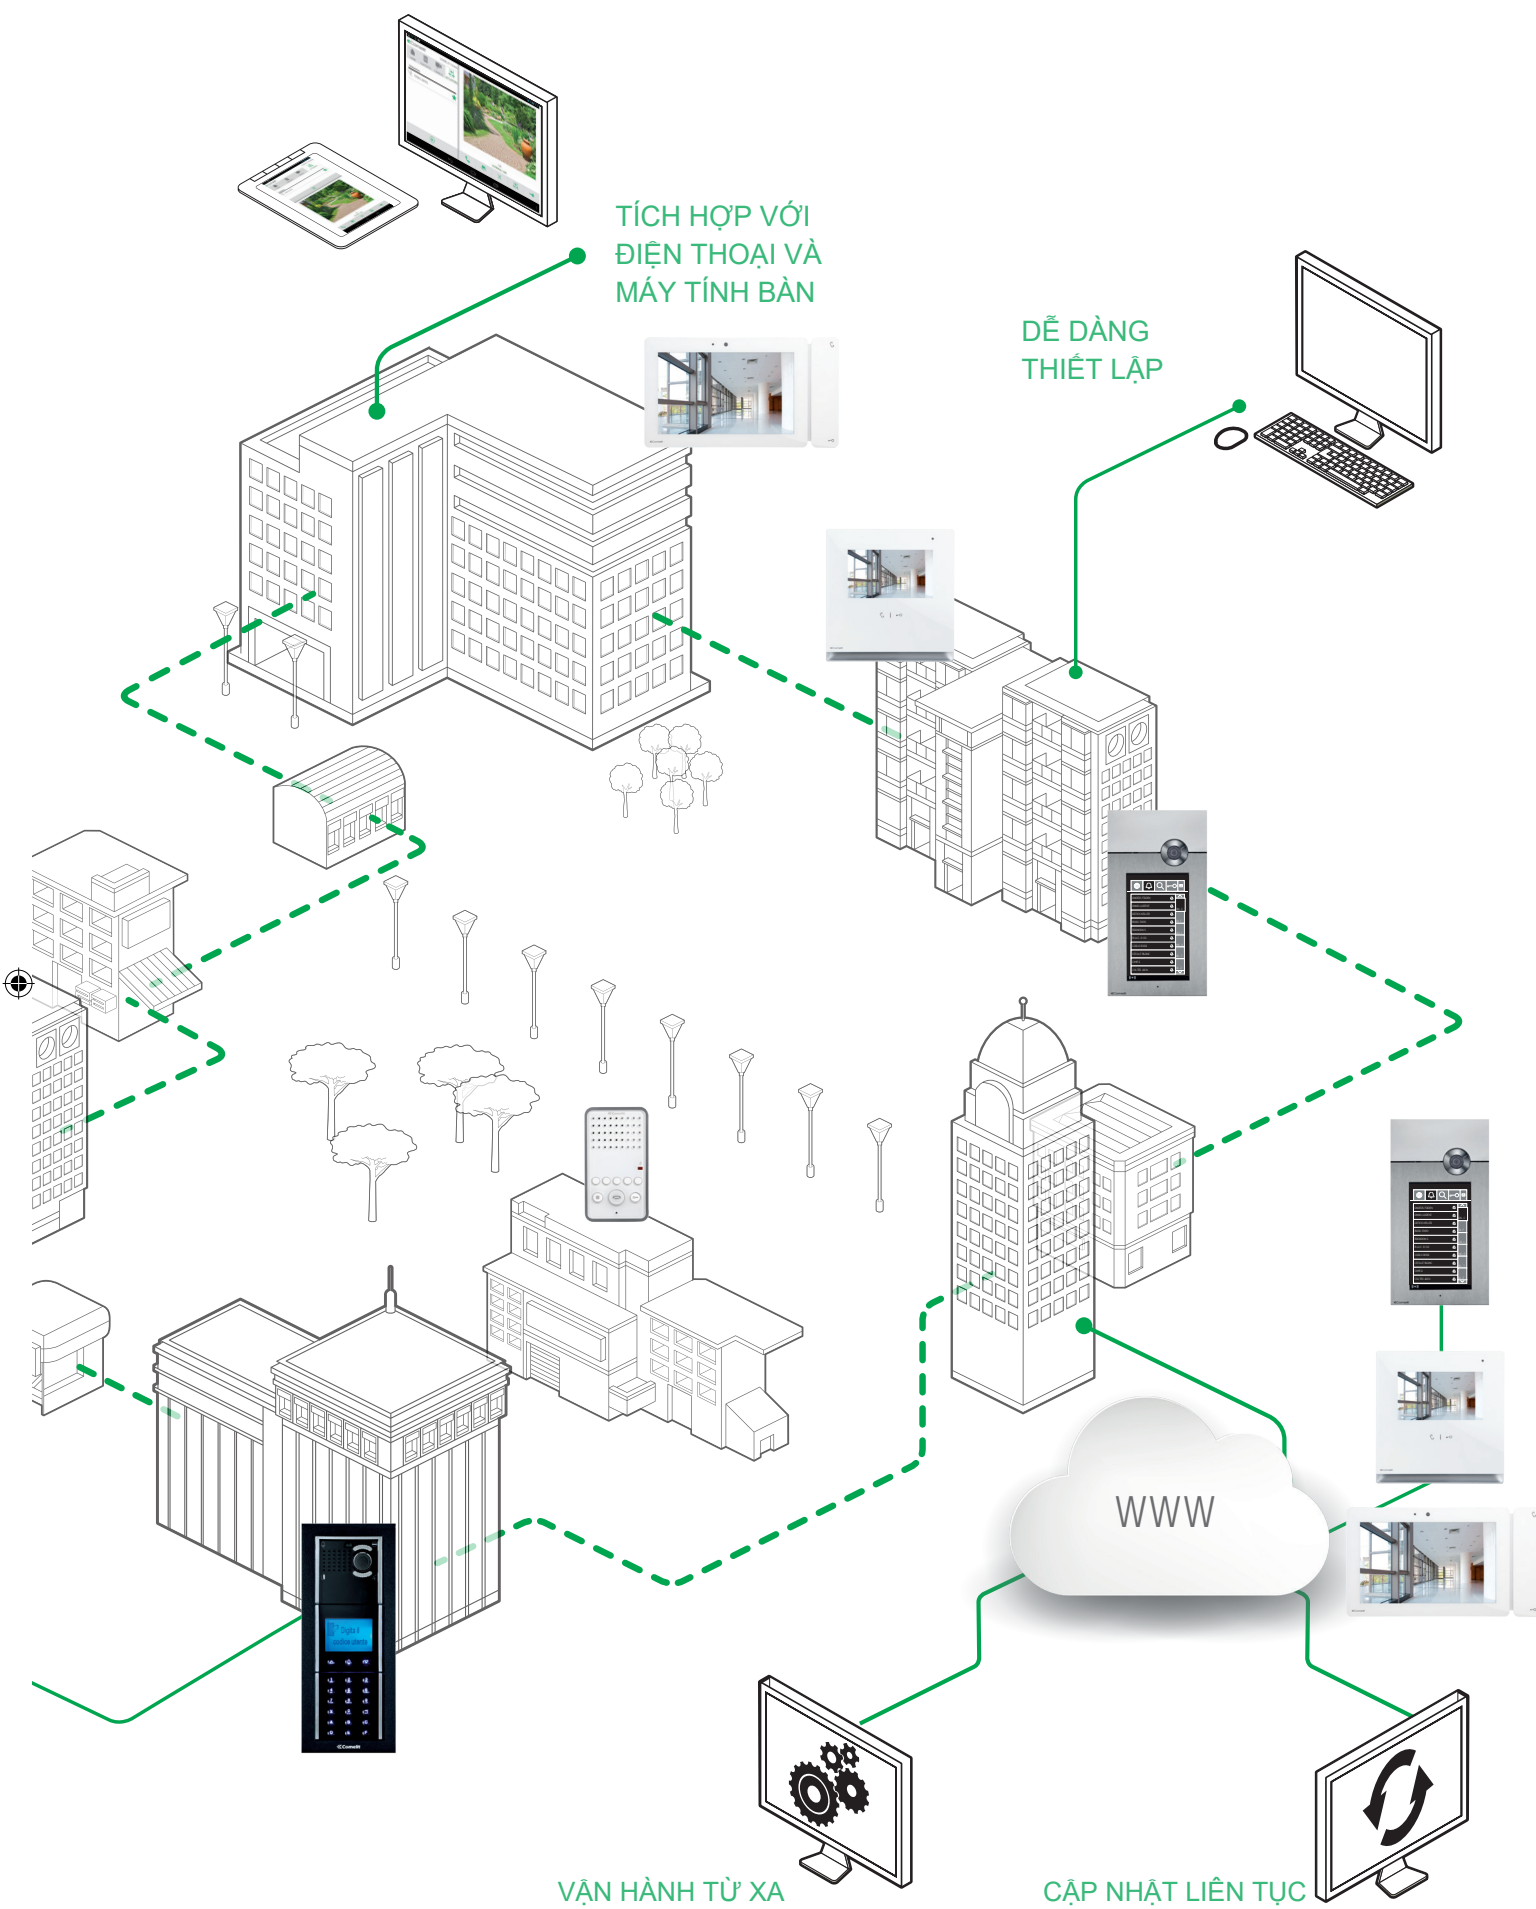





ƯU ĐIỂM CỦA HỆ THỐNG VIP

HỆ THỐNG VIP

QUẢN LÝ NHIỀU NƠI CÙNG LÚC

Comelit có thể đáp ứng được nhu cầu lắp đặt thiết bị tại nhiều địa điểm với các thiết bị trong hệ thống VIP của Comelit có thể giao tiếp với nhau thông qua Internet hoặc mạng LAN. Ví dụ để giao tiếp thông tin liên lạc giữa các văn phòng trong 1 công ty hoặc giữa các chi nhánh và một văn phòng trung tâm. Comelit có thể thiết kế và cung cấp cơ sở hạ tầng cần thiết để vận hành và đưa ra các giải pháp phù hợp cho từng hệ thống.

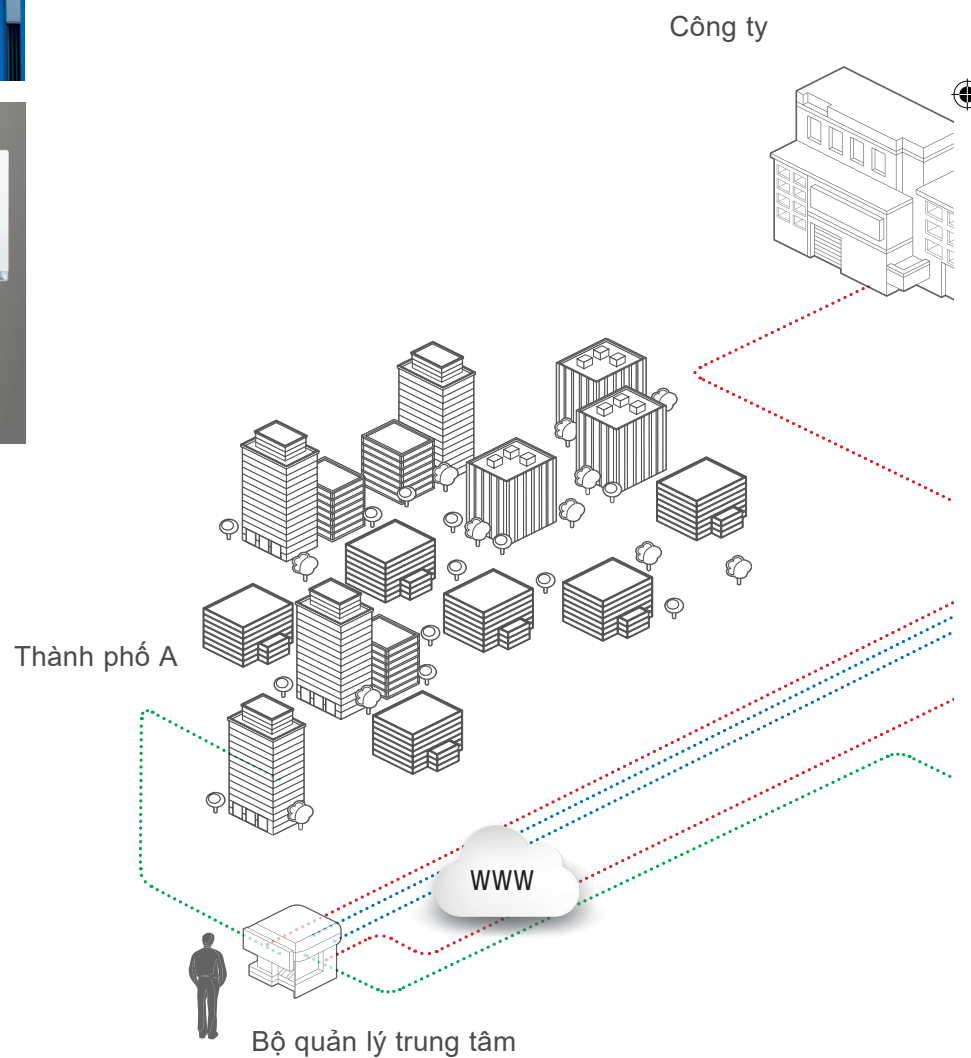

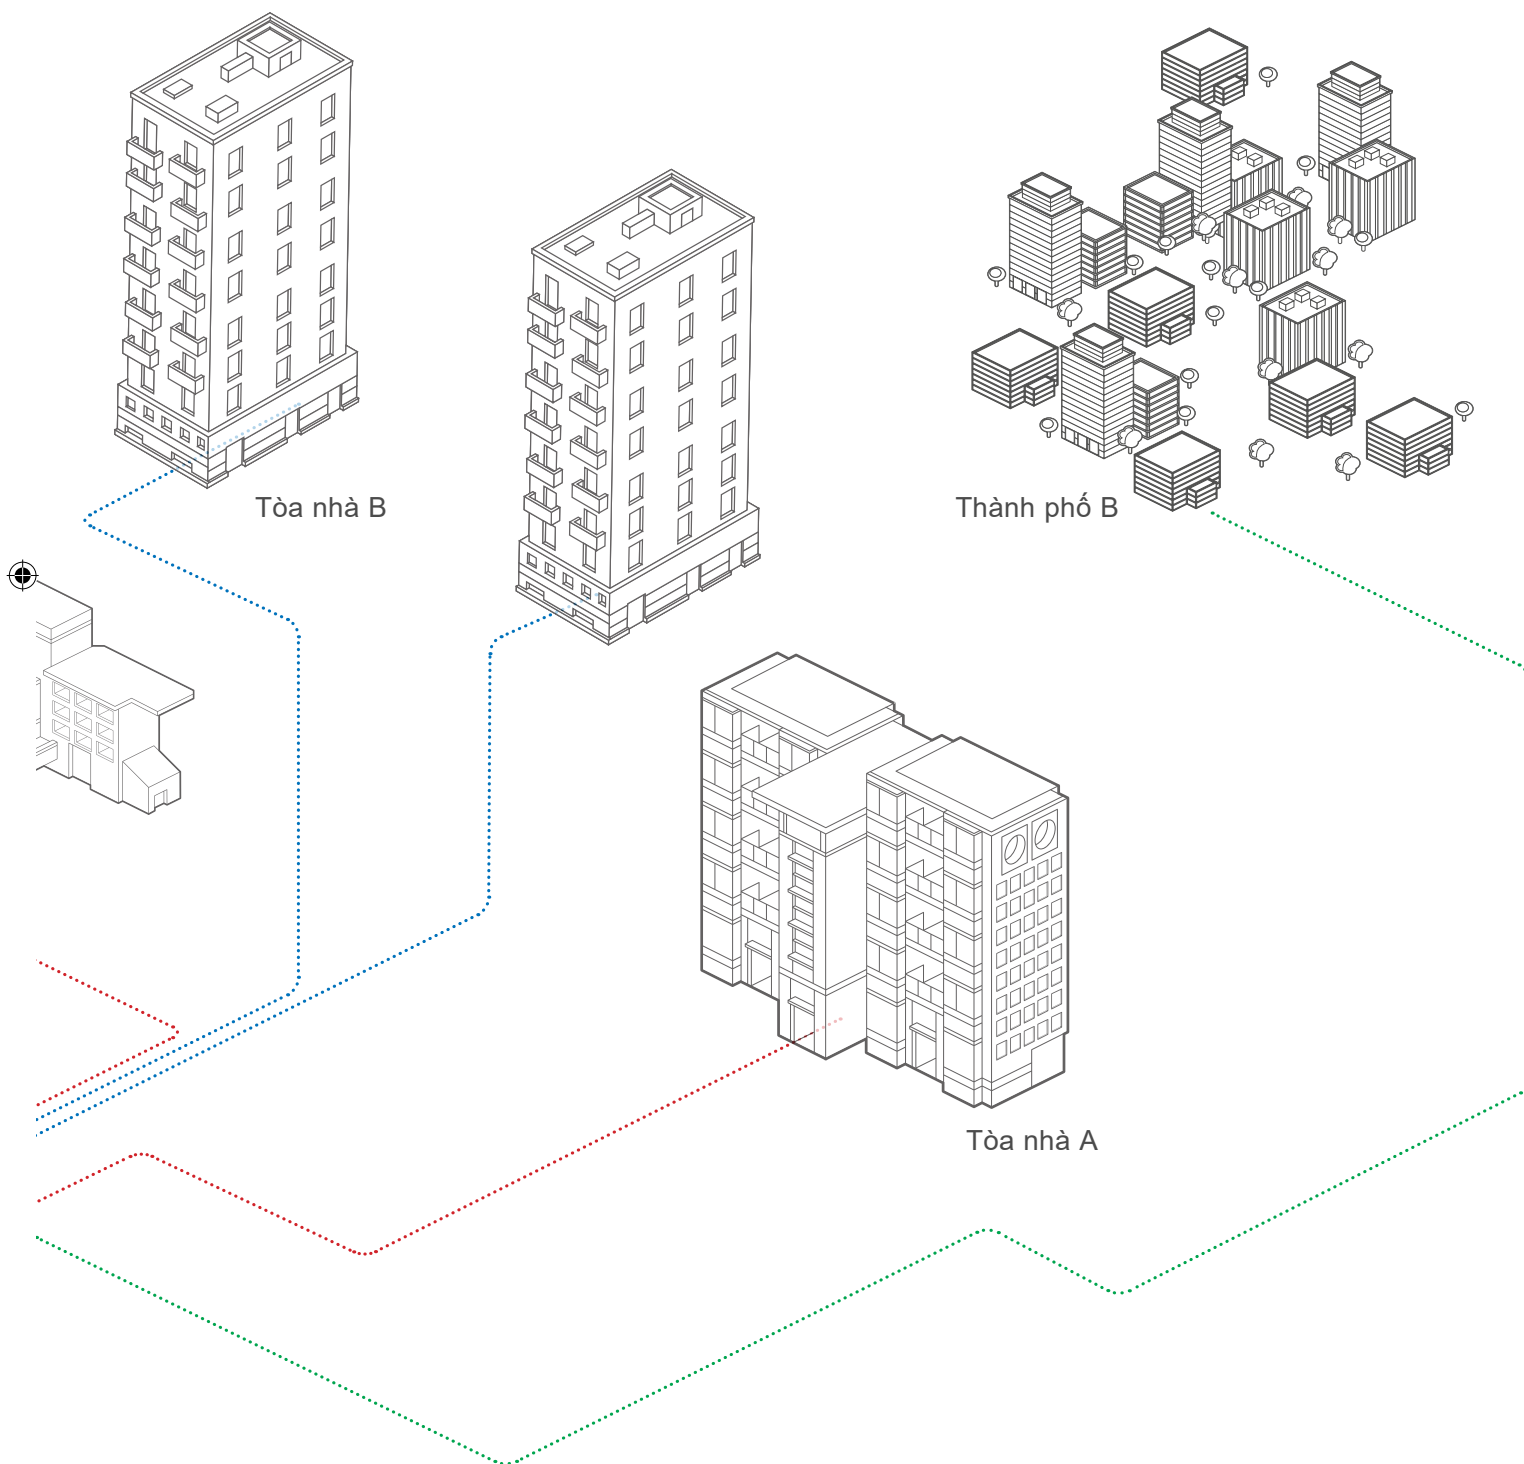

ƯU ĐIỂM CỦA HỆ THỐNG VIP


HỆ THỐNG VIP

THIẾT LẬP KHÔNG GIỚI HẠN




Hệ thống ViP mang đến người dùng sự linh hoạt tối đa trong việc thay đổi cấu hình hay kết nối thêm các thiết bị mà không cần nghiệp vụ kỹ thuật cao. Giải pháp của ViP vượt qua các giới hạn của các chương trình kiểu cũ như: khoảng cách giữa các thiết bị, mở rộng bằng thông, số lượng thiết bị có thể lắp lên cùng 1 hệ thống...

Hơn nữa, công nghệ giao tiếp kỹ thuật số cho phép các cuộc hội thoại âm thanh hoặc video đồng thời diễn ra mà hệ thống không bị “bận”.

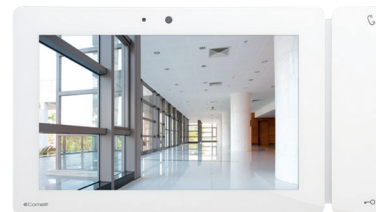

- Căn hộ - Căn hộ
- Đơn vị ngoài - Căn hộ
- Đơn vị quản lý - Căn hộ
- Tòa nhà - Tòa nhà
- Quản lý trung tâm - Căn hộ

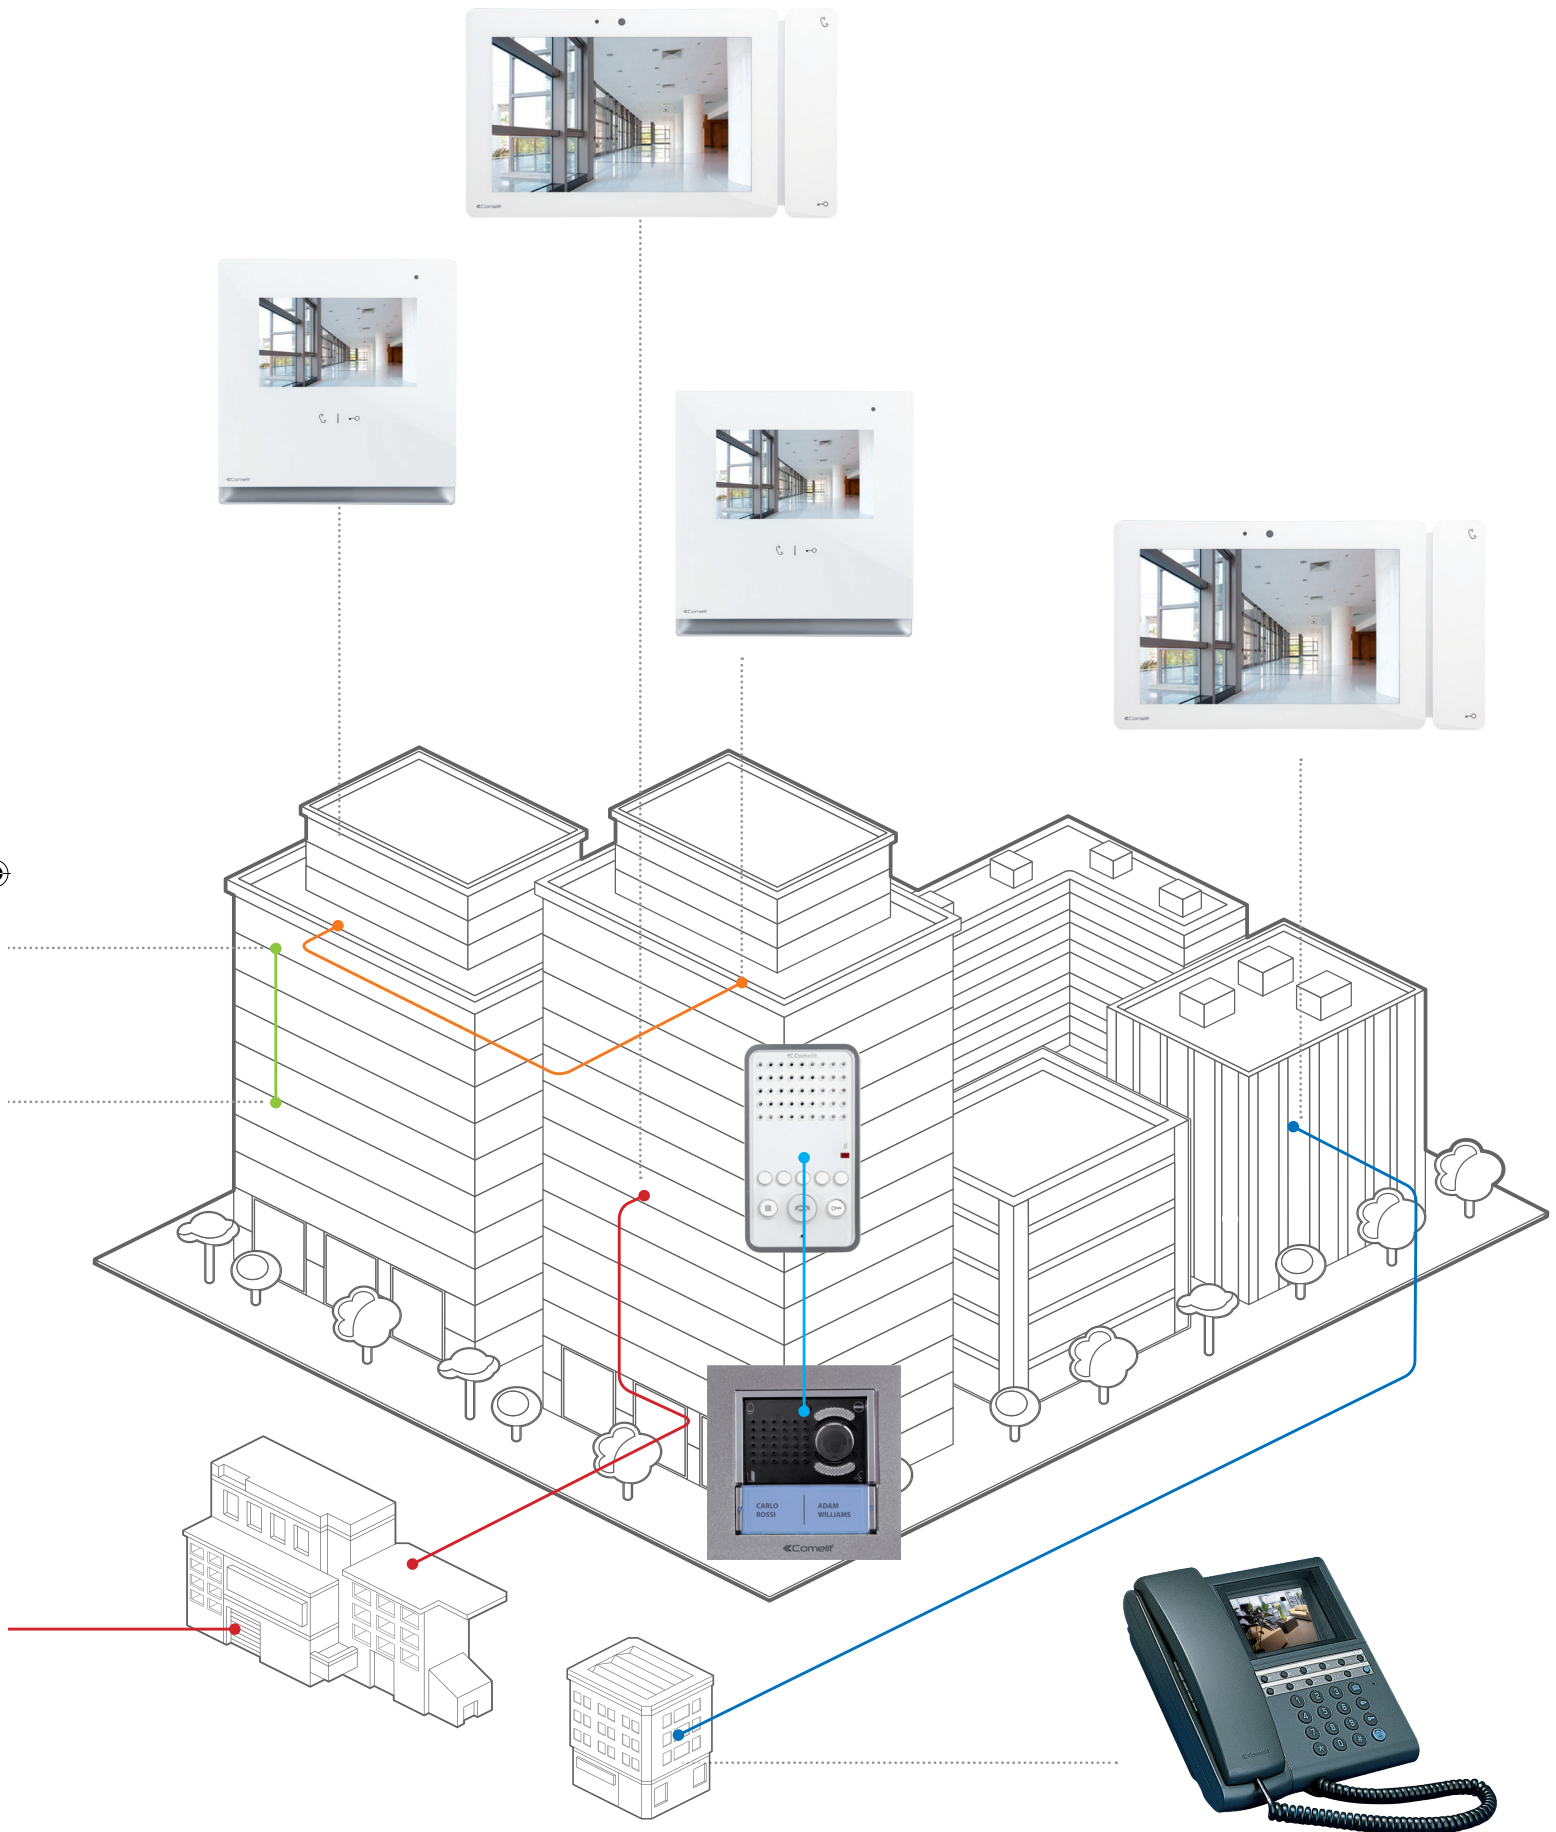



ƯU ĐIỂM CỦA HỆ THỐNG VIP

HỆ THỐNG VIP




THIẾT BỊ KẾT NỐI "NGANG HÀNG"

Các thiết bị trong hệ thống ViP được thiết kế "ngang hàng", có nghĩa là các thiết bị có thể kết nối trực tiếp với nhau một cách độc lập.

Ví dụ như các nhân viên trong văn phòng có thể giao tiếp với nhau qua thiết bị Comelit riêng của họ mà không cần thông qua thiết bị trung tâm kết nối nào. Điều đó hạn chế việc một thiết bị trung tâm bị hỏng làm ảnh hưởng đến các thiết bị khác.

DỄ DÀNG CÀI ĐẶT

Hệ thống ViP không yêu cầu kỹ thuật viên phải có trình độ nhất định hay sử dụng các thiết bị chuyên dụng để thao tác. Tất cả các thiết bị của Comelit khi được kết nối với nhau và kết nối mạng, chúng sẽ tự động cài đặt cấu hình mà không cần sự truy cập hay can thiệp vật lý nào.

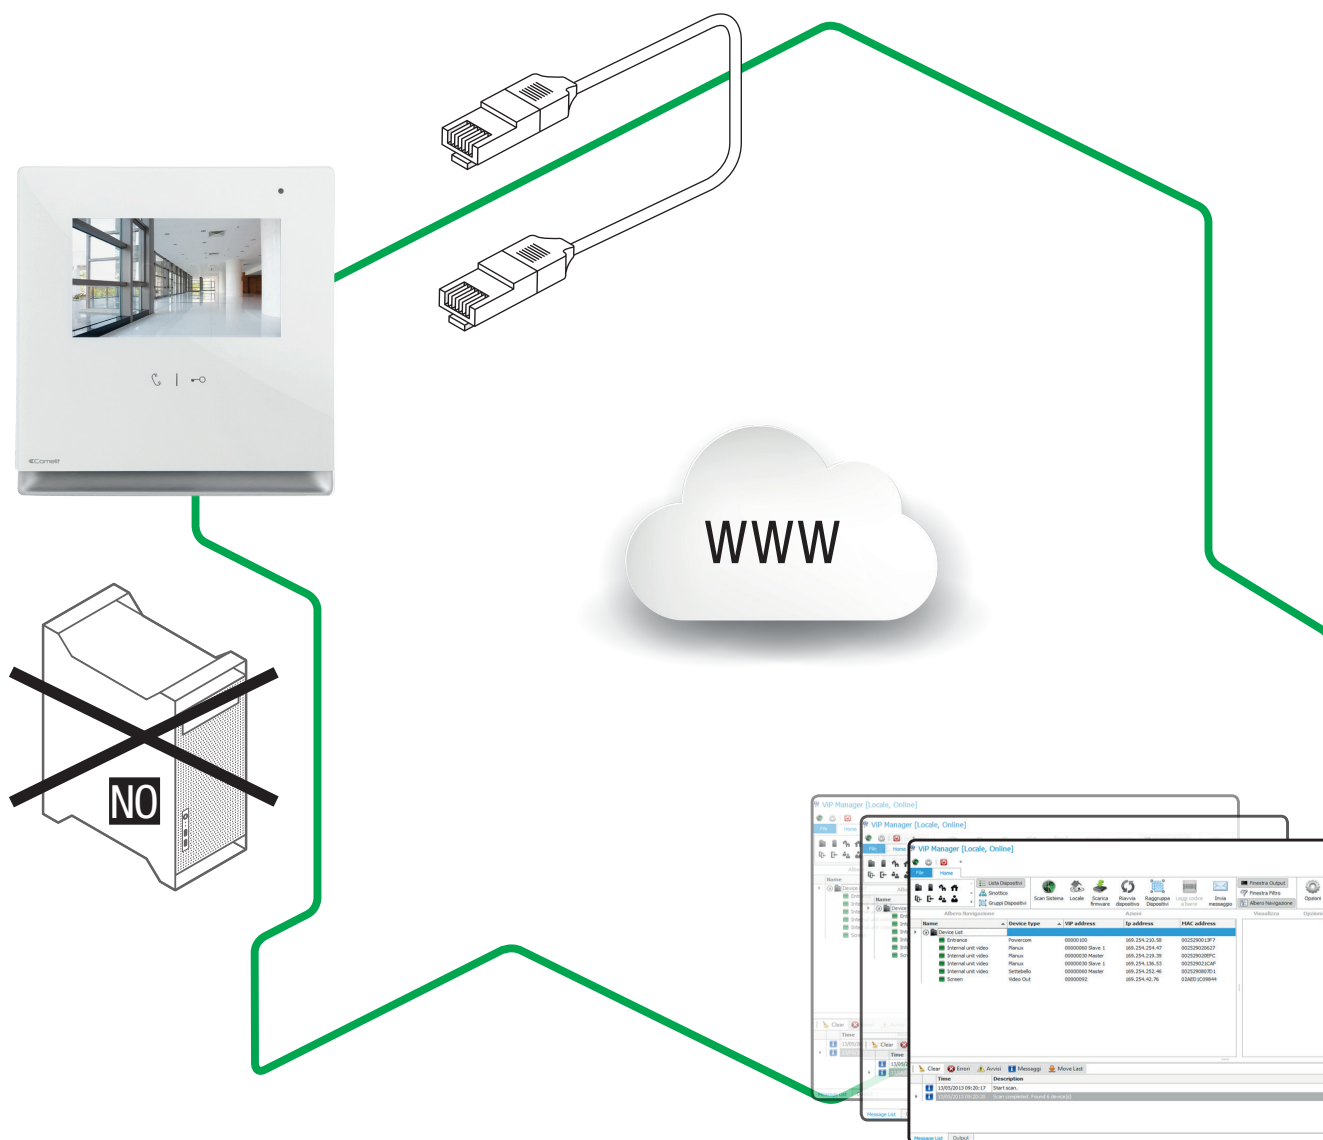

VẬN HÀNH TỪ XA

Tất cả các chức năng cấu hình hệ thống có thể được thực hiện từ xa thông qua Internet. Điều này có nghĩa là các thay đổi không yêu cầu hành động trực tiếp trên chính hệ thống, giúp giảm chi phí vận hành mà vẫn nâng cao chất lượng dịch vụ được cung cấp.

CẬP NHẬT DỄ DÀNG

Phần mềm quản lý của hệ thống ViP cho phép người quản lý cấu hình lại các thiết bị mà không cần trực tiếp đến tận nơi thiết bị được lắp đặt. Danh sách người dùng mới cũng có thể được cập nhật chỉnh sửa từ xa và hệ thống sẽ tự động lưu trữ.



ƯU ĐIỂM CỦA HỆ THỐNG VIP

HỆ THỐNG VIP

TÍCH HỢP VỚI HỆ THỐNG MẠNG CÓ SẴN

Các thiết bị trong hệ thống ViP cũng có thể được kết nối với mạng LAN có sẵn của khách hàng, điều đó cho phép các chức năng của hệ thống chuông hình số có thể được thêm vào mà không cần đi thêm dây. Trong trường hợp này, phần mềm quản lý hệ thống ViP và các thiết bị khác sẽ cùng hoạt động với nhau trên cùng một mạng LAN.


TÍCH HỢP VỚI HỆ THỐNG VOIP (VOICE OVER IP)

Các thiết bị trong hệ thống VoIP hoặc hệ thống SIP có sẵn cũng đều tích hợp được với hệ thống ViP bằng phương thức ViP2SIP. Việc tích hợp này cho phép người dùng sử dụng chuông Comelit gọi trực tiếp vào thiết bị điện thoại bàn SIP cũng như sử dụng điện thoại bàn để trả lời chuông hình từ bất cứ đâu trong nhà như cổng, cửa nhà, lối vào,...

KẾT HỢP VỚI CAMERA VÀ HỆ THỐNG QUẢN LÝ RA VÀO

Một ứng dụng khác của hệ thống ViP là cho phép sử dụng cũng 1 mạng IP để tích hợp thêm thiết bị giám sát hoặc bảo mật khác như hệ thống quản lý truy cập hoặc camera CCTV vào hệ thống chuông hình có sẵn.



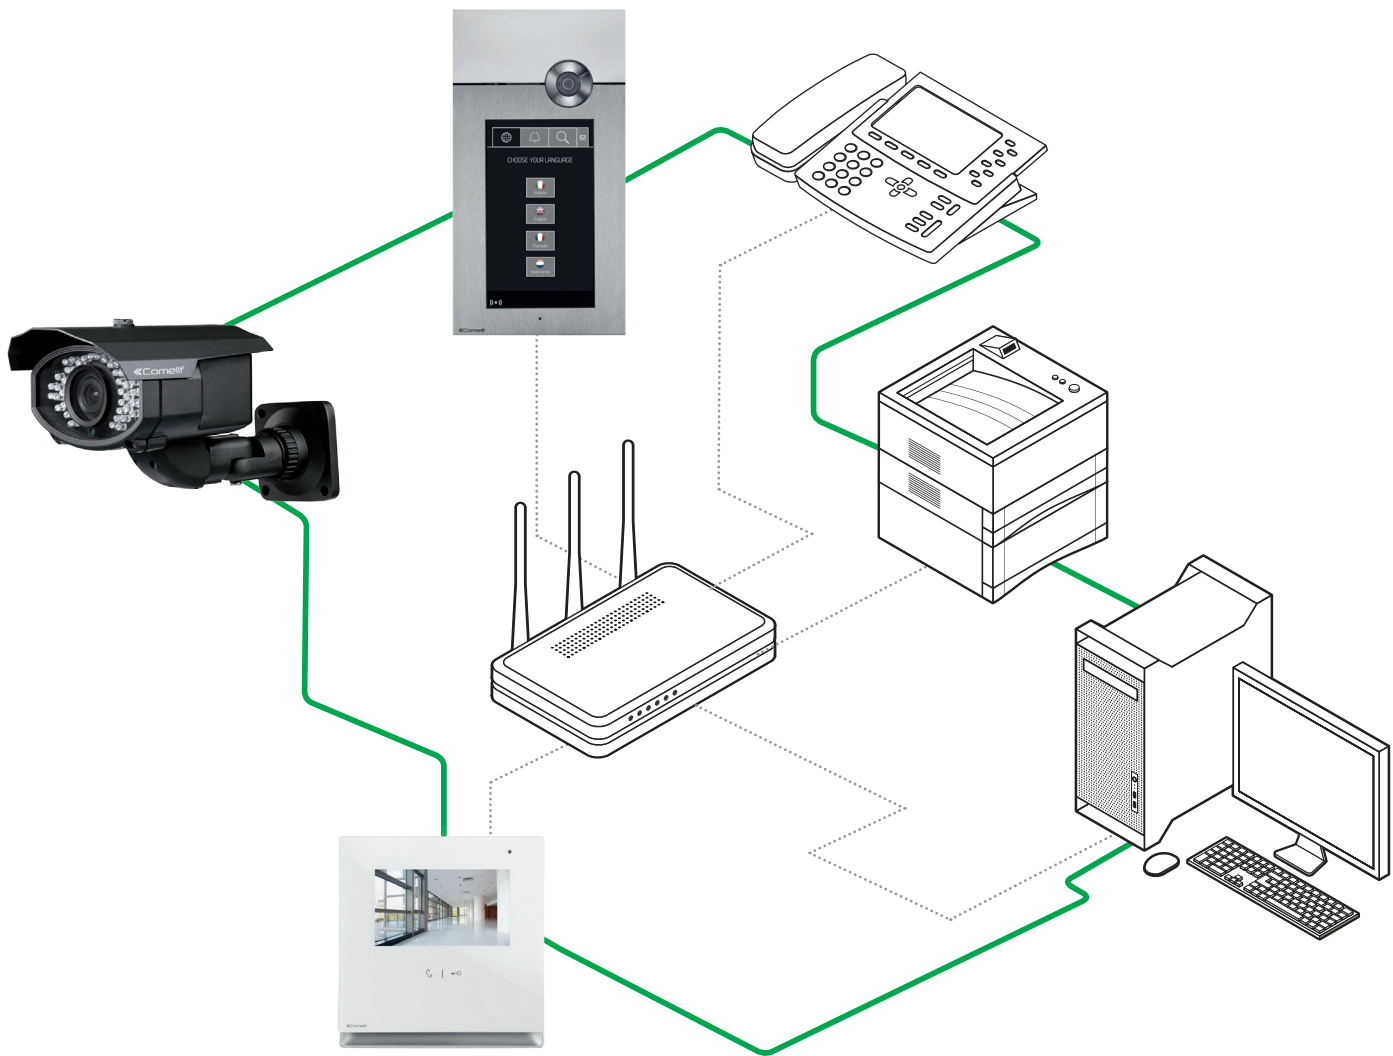



ƯU ĐIỂM CỦA HỆ THỐNG VIP

HỆ THỐNG VIP





NHỮNG ƯU ĐIỂM CHO VIỆC QUẢN LÝ VÀ VẬN HÀNH

TIỀN PHONG

Hệ thống ViP luôn tiên phong đầu tư hạ tầng thiết bị, giúp cho video từ chuông hình luôn có chất lượng tuyệt vời

KHẢ NĂNG MỞ RỘNG

Sự linh hoạt của ViP cho phép hệ thống có thể mở rộng hoặc nâng cấp theo yêu cầu khách hàng

DỄ DÀNG CẬP NHẬT

Hệ thống có thể được điều chỉnh mà không can thiệp đến cấu trúc lắp đặt. Điều này đảm bảo cho thiết bị hoạt động đúng công năng ngay cả khi hệ thống cập nhật

KHẢ NĂNG TƯƠNG THÍCH

Cơ sở hạ tầng mạng có sẵn được lắp đặt cho các dịch vụ khác cũng có thể được sử dụng để lắp đặt thiết bị

ĐA CÔNG DỤNG

Hệ thống ViP cho phép gửi tin nhắn văn bản hoặc hình ảnh hoặc âm thanh từ xa đến các thiết bị Comelit trong trong căn hộ

HIỆU QUẢ

Hệ thống VIP giảm thiểu chi phí hệ thống dây điện, vận hành và bảo trì cho người dùng



ƯU ĐIỂM CỦA HỆ THỐNG VIP

HỆ THỐNG VIP





NHỮNG ƯU ĐIỂM CHO VIỆC LẮP ĐẶT

DỄ DÀNG

Trong việc lên kế hoạch lắp đặt và chi phí

THỰC TIỄN

Không cần quá nhiều tài liệu hướng dẫn để lắp đặt

LINH HOẠT

Hệ thống được cấu trúc để mọi thay đổi về cấu hình đều đơn giản

HIỆN ĐẠI

Cập nhật hệ thống hoàn toàn bằng máy tính bàn và không cần can thiệp trực tiếp vào thiết bị

THUẬN TIỆN

Hệ thống sử dụng loại dây tiêu chuẩn cho các thao tác dễ dàng

ĐƠN GIẢN

Thiết bị có tính tự động hóa cao nên người lắp đặt không cần nhiều kỹ thuật chuyên sâu

LINH HOẠT

Bao gồm các chức năng quản lý ra vào và quản lý cuộc gọi

ĐÁNG TIN CẬY

Tất cả các thiết bị đều có khả năng hoạt động độc lập

THỰC TIỄN

Các thiết bị có thể được nâng cấp từ xa

KHẢ NĂNG TƯƠNG THÍCH

Hệ thống có thể giao tiếp với các thiết bị khác, tối ưu linh hoạt mà vẫn đảm bảo an ninh

DỄ DÀNG TRUY CẬP

Bảo trì và quản lý hệ thống có thể được thực hiện từ xa



ƯU ĐIỂM CỦA HỆ THỐNG VIP

HỆ THỐNG VIP





NHỮNG ƯU ĐIỂM CHO NGƯỜI DÙNG

CHẤT LƯỢNG

Công nghệ chuông hình tiên tiến cho phép người dùng thoải mái giao tiếp 2 chiều từ trong và ngoài nhà

TỰ DO

Các cuộc gọi từ chuông hình có thể được trả lời bằng điện thoại hoặc máy tính bảng

LUÔN XUẤT HIỆN KHI CẦN

Tin nhắn và các cuộc gọi thoại luôn được lưu lại phòng khi bạn cần đến

DỊCH VỤ TỈ MỈ

ViP cũng có thể ghi lại tin nhắn thoại để phát lại khi bạn không có nhà

AN NINH CAO


Hệ thống ViP có thể được sử dụng để truyền tín hiệu trong các trường hợp báo động được thông báo từ hệ thống trung tâm



SƠ ĐỒ SỬ DỤNG

HỆ THỐNG CHUÔNG HÌNH GỒM 1 CỔNG VÀO CHO ÂM THANH/VIDEO
TÍN HIỆU ANALOG VÀ 1 HỆ DÂY CÁP DẪN

HỆ THỐNG VIP

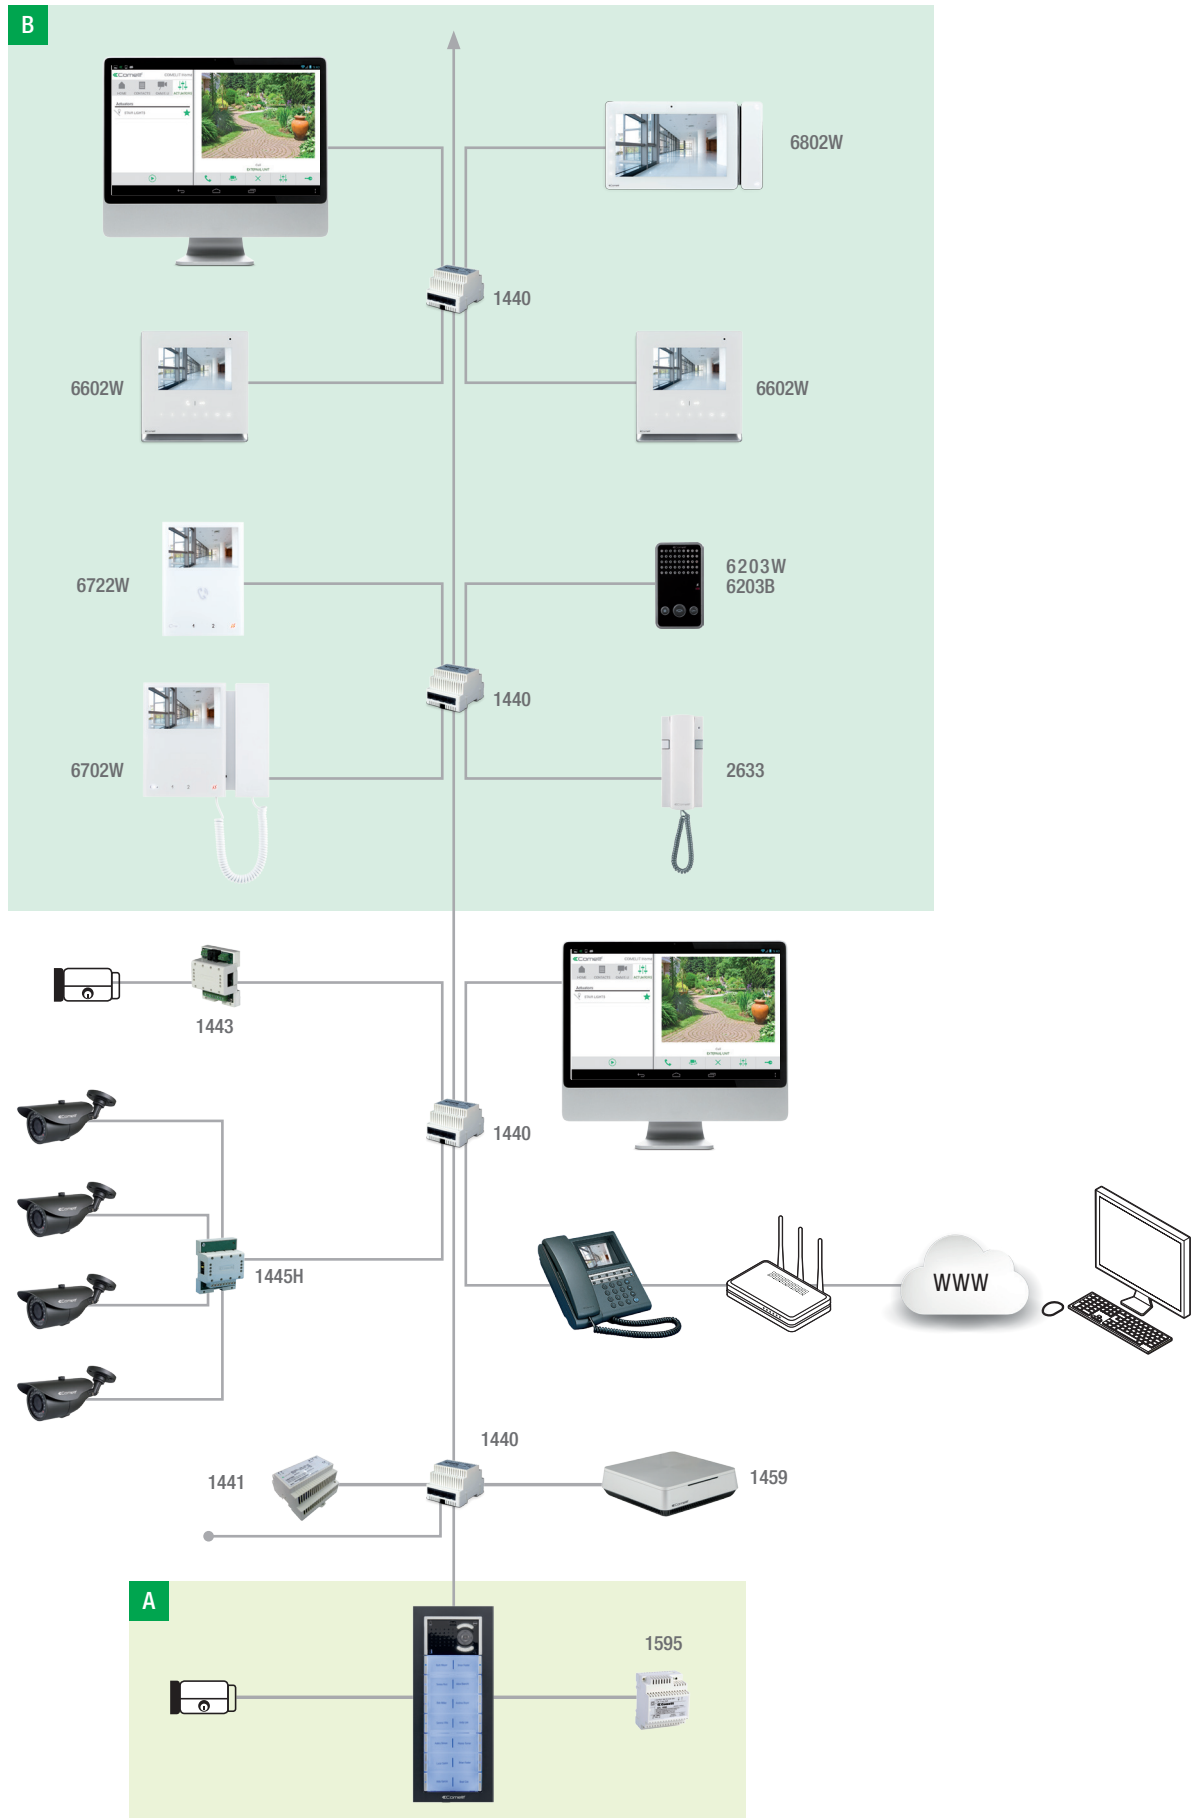

**A CHUÔNG HÌNH****CHUÔNG HÌNH ANALOGUE**

	3110/1	3110/2	3110/3	3110/4	3311/1S	3311/2S	3311/3S	3311/4S	33410	33411	33412	33433	33434	33436	3336	4682HC	1595	1441	1440
Số lượng người dùng																			
1	1				1					1						1	1	1	1
2	1				1						1					1	1	1	1
3		1				1			1			1				1	1	1	1
4		1				1			1				1			1	1	1	1
5-6	1					1			1					1		1	1	1	2
7-8		1				1					1			1		1	1	1	2
9-10			1				1		1				1	1		1	1	1	3
11-12			1				1		1					2		1	1	1	3
13-14			1				1				1			2		1	1	1	4
15-16				1				1	1				1	2		1	1	1	4
17-18				1				1	1					3		1	1	1	5
19-20				1				1			1			3		1	1	1	5
21-22			2				2		1				1	3	1	1	1	1	6
23-24			2				2		1					4	1	1	1	1	6
25-26			2				2				1			4	1	1	1	1	7
27-28			2				2		1				1	4		1	1	1	7
29-30			2				2		1					5		1	1	2	8
31-32			2				2				1			5		1	1	2	8
33-34				2				2	1				1	5	1	1	1	2	9
35-36				2				2	1					6	1	1	1	2	9
37-38				2				2			1			6	1	1	1	2	10
39-40				2				2	1				1	6		1	1	2	10
41-42				2				2	1					7		1	1	2	11
43-44				2				2			1			7		1	1	2	11
45-46			3				3		1				1	7		1	1	2	12
47-48			3				3		1					8		1	1	2	12
49-50			3				3				1			8		1	1	2	13

B MÀN HÌNH QUẢN LÝ**MÀN HÌNH QUẢN LÝ**

6602W	6902W	6203W 6203B	2633
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5-6	5-6	5-6	5-6
7-8	7-8	7-8	7-8
9-10	9-10	9-10	9-10
11-12	11-12	11-12	11-12
13-14	13-14	13-14	13-14
15-16	15-16	15-16	15-16
17-18	17-18	17-18	17-18
19-20	19-20	19-20	19-20
21-22	21-22	21-22	21-22
23-24	23-24	23-24	23-24
25-26	25-26	25-26	25-26
27-28	27-28	27-28	27-28
29-30	29-30	29-30	29-30
31-32	31-32	31-32	31-32
33-34	33-34	33-34	33-34
35-36	35-36	35-36	35-36
37-38	37-38	37-38	37-38
39-40	39-40	39-40	39-40
41-42	41-42	41-42	41-42
43-44	43-44	43-44	43-44
45-46	45-46	45-46	45-46
47-48	47-48	47-48	47-48
49-50	49-50	49-50	49-50


GHI CHÚ

- 1/ Nên để sẵn một đầu chờ cho cổng ra của thiết bị 1440 cho thiết bị khác nếu lắp thêm vào hệ thống
- 2/ Thiết bị 6602W và 6902W chỉ có thể gắn trên bề mặt tường phẳng

SƠ ĐỒ SỬ DỤNG

HỆ THỐNG CHUÔNG HÌNH GỒM 1 CỔNG VÀO ÂM THANH/VIDEO
TÍN HIỆU DIGITAL VÀ 1 HỆ DÂY CÁP DẪN

HỆ THỐNG VIP

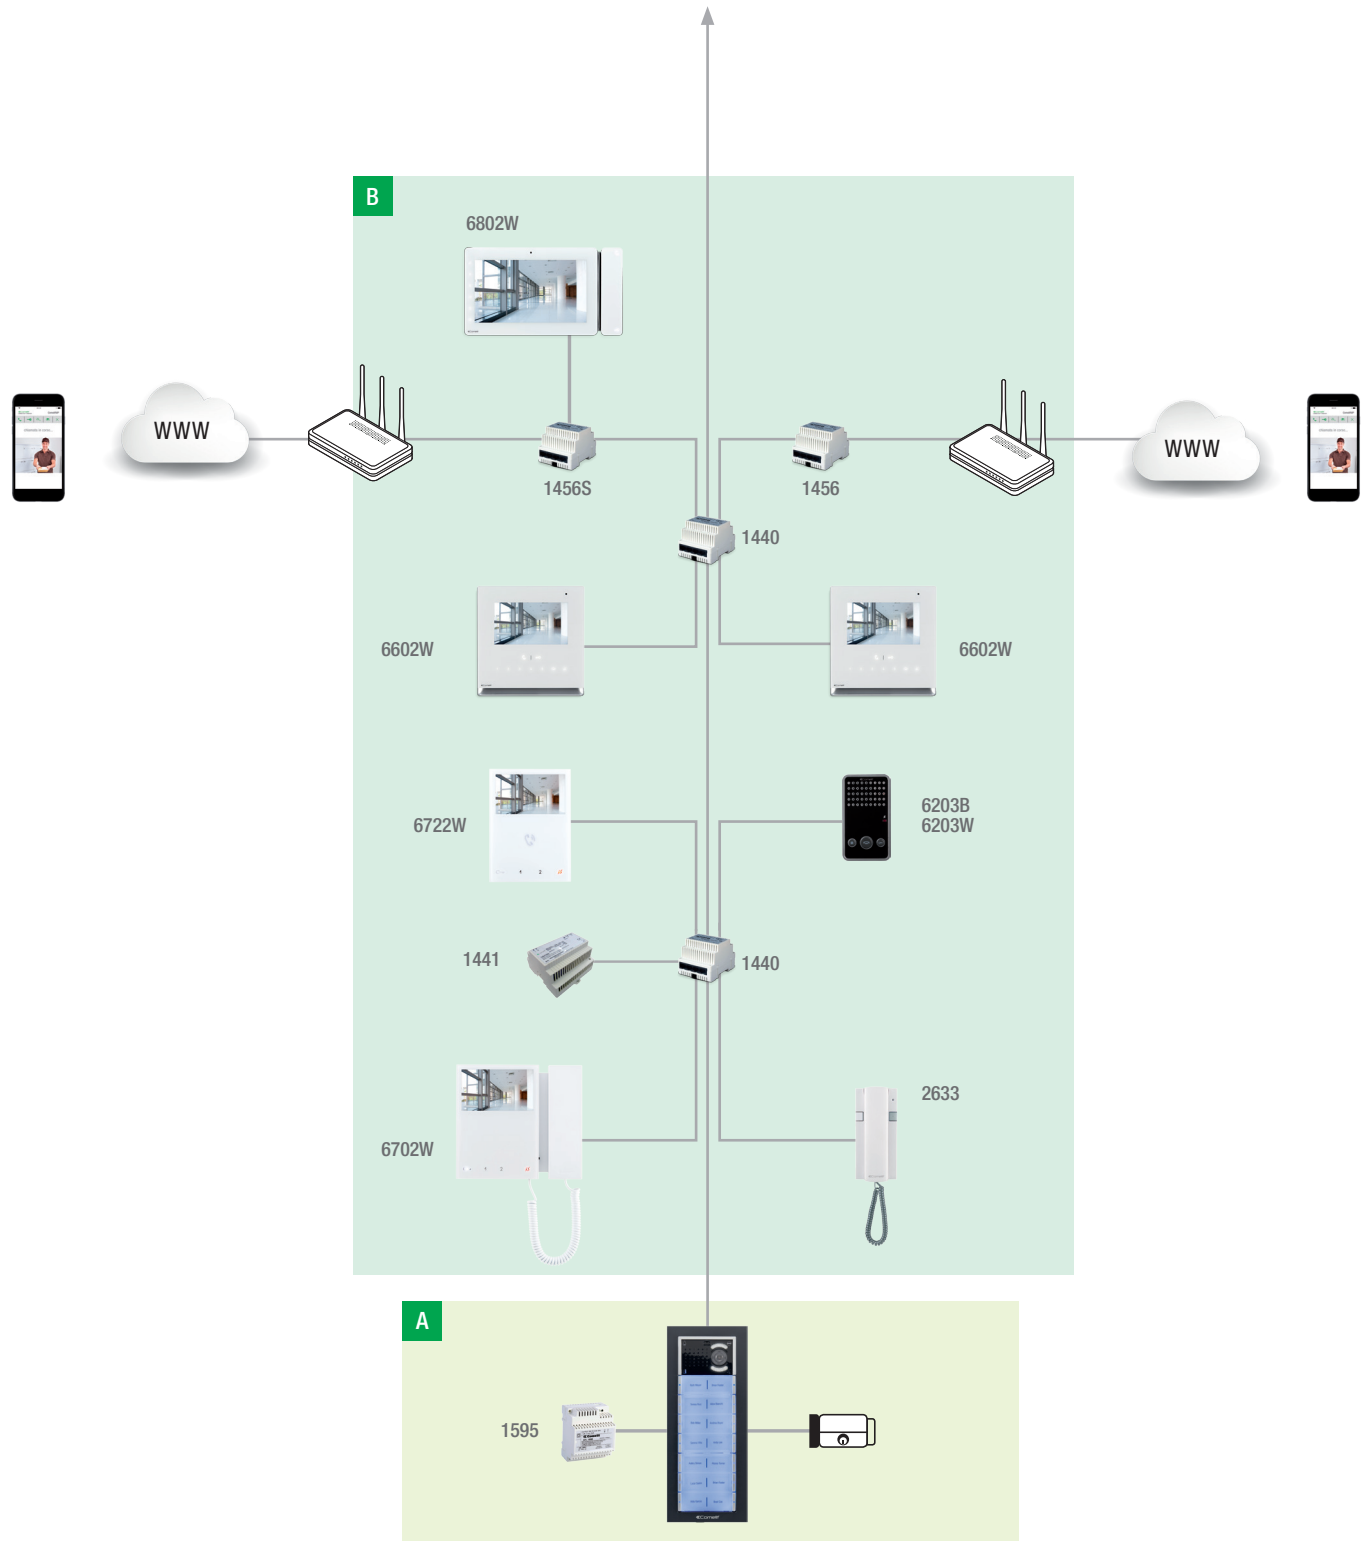

**A CHUÔNG HÌNH****CHUÔNG HÌNH ANALOGUE**

	3110/3	3311/3S	33410	3360B	4682HC	1595	1441	1440
Số lượng người dùng								
1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1
5-6	1	1	1	1	1	1	1	2
7-8	1	1	1	1	1	1	1	2
9-10	1	1	1	1	1	1	1	3
11-12	1	1	1	1	1	1	1	3
13-14	1	1	1	1	1	1	1	4
15-16	1	1	1	1	1	1	1	4
17-18	1	1	1	1	1	1	1	5
19-20	1	1	1	1	1	1	1	5
21-22	1	1	1	1	1	1	1	6
23-24	1	1	1	1	1	1	1	6
25-26	1	1	1	1	1	1	1	7
27-28	1	1	1	1	1	1	1	7
29-30	1	1	1	1	1	1	2	8
31-32	1	1	1	1	1	1	2	8
33-34	1	1	1	1	1	1	2	9
35-36	1	1	1	1	1	1	2	9
37-38	1	1	1	1	1	1	2	10
39-40	1	1	1	1	1	1	2	10
41-42	1	1	1	1	1	1	2	11
43-44	1	1	1	1	1	1	2	11
45-46	1	1	1	1	1	1	2	12
47-48	1	1	1	1	1	1	2	12
49-50	1	1	1	1	1	1	2	13

B MÀN HÌNH QUẢN LÝ**MÀN HÌNH QUẢN LÝ**

6602W	6802W	6203W 6203B	2633
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5-6	5-6	5-6	5-6
7-8	7-8	7-8	7-8
9-10	9-10	9-10	9-10
11-12	11-12	11-12	11-12
13-14	13-14	13-14	13-14
15-16	15-16	15-16	15-16
17-18	17-18	17-18	17-18
19-20	19-20	19-20	19-20
21-22	21-22	21-22	21-22
23-24	23-24	23-24	23-24
25-26	25-26	25-26	25-26
27-28	27-28	27-28	27-28
29-30	29-30	29-30	29-30
31-32	31-32	31-32	31-32
33-34	33-34	33-34	33-34
35-36	35-36	35-36	35-36
37-38	37-38	37-38	37-38
39-40	39-40	39-40	39-40
41-42	41-42	41-42	41-42
43-44	43-44	43-44	43-44
45-46	45-46	45-46	45-46
47-48	47-48	47-48	47-48
49-50	49-50	49-50	49-50

GHI CHÚ


- 1/ Người dùng có ứng dụng ComelitViP Remote có thể nhận các cuộc gọi từ chuông hình qua wifi bằng điện thoại
- 2/ Thiết bị 6602W và 6902W chỉ có thể gắn trên bề mặt tường phẳng



SƠ ĐỒ SỬ DỤNG

HỆ THỐNG CHUÔNG HÌNH GỒM 2 CỔNG VÀO (1 CỔNG VÀO ÂM THANH/VIDEO VÀ 1 CỔNG VÀO ÂM THANH) VÀ 1 HỆ DÂY CÁP DẪN

VIP SYSTEM

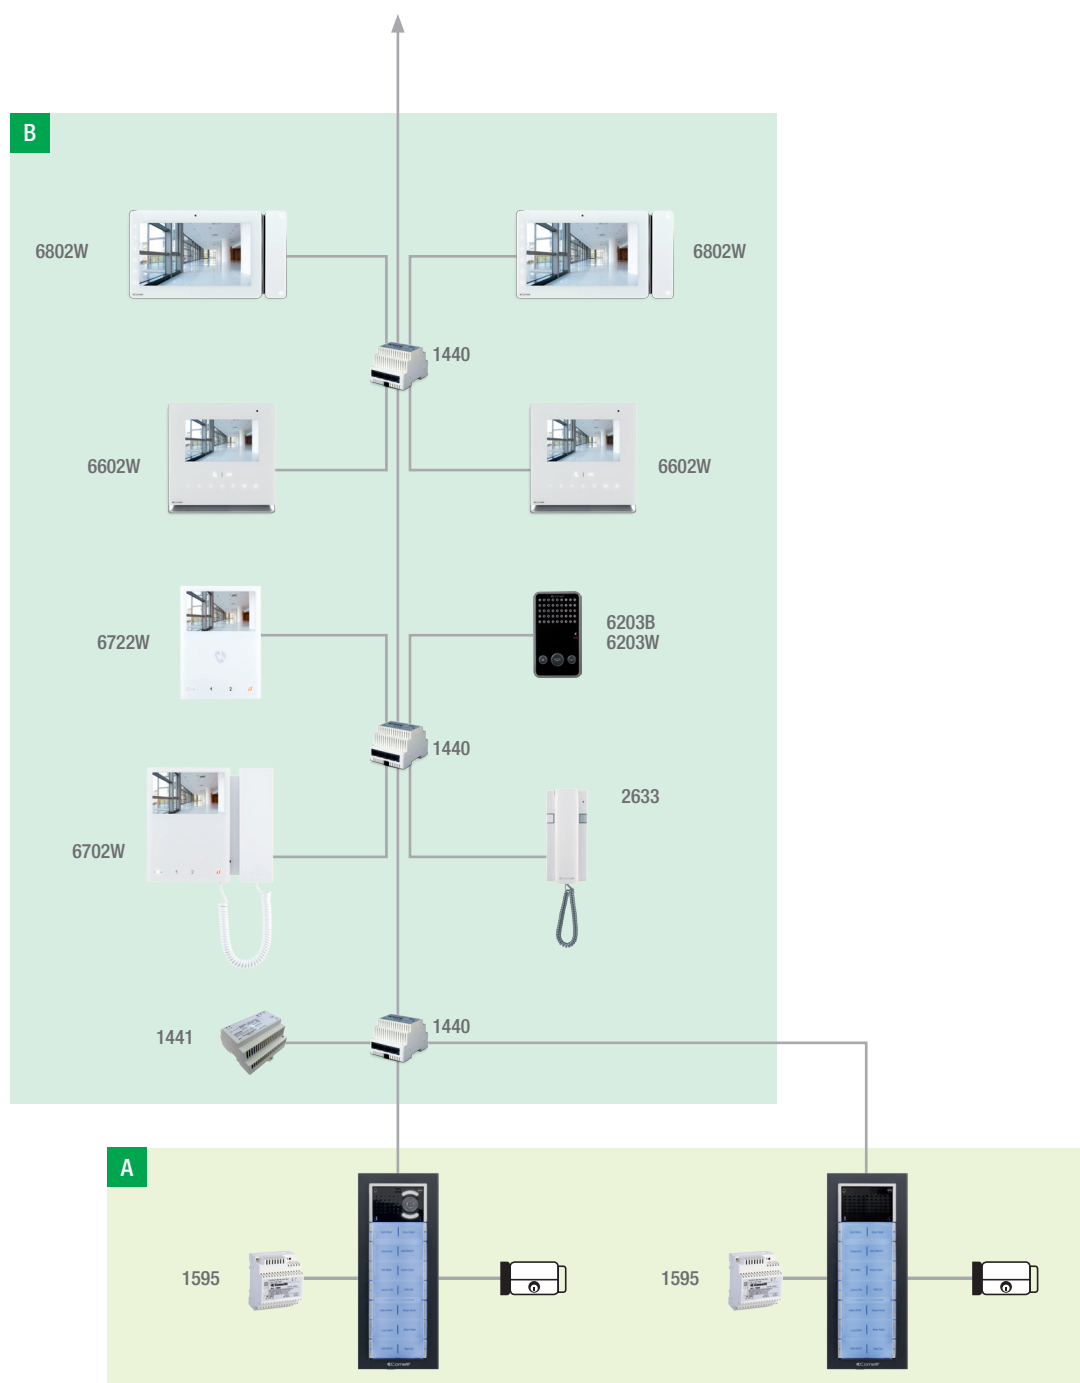

**A CHUÔNG HÌNH**

CHUÔNG HÌNH

	3110/1	3110/2	3110/3	3110/4	3311/1S	3311/2S	3311/3S	3311/4S	33410	33411	33412	33400	33401	33402	33433	33434	33436	3336	4682HC	1595	1441	1440
Số lượng người dùng																						
1	2				2					1			1						1	2	1	1
2	2				2						1			1					1	2	1	1
3		2				2			1			1			2				1	2	1	1
4		2				2			1			1				2			1	2	1	1
5-6		2				2			1			1					2		1	2	1	2
7-8		2				2					1			1			2		1	2	1	2
9-10			2				2		1			1				2	2		1	2	1	3
11-12			2			2		1				1					4		1	2	1	3
13-14			2				2				1			1			4		1	2	1	4
15-16				2				2	1			1				2	4		1	2	1	4
17-18				2				2	1			1					6		1	2	1	5
19-20				2				2			1			1			6		1	2	1	5
21-22			4				4		1			1				2	6	2	1	2	1	6
23-24			4				4		1			1					8	2	1	2	1	6
25-26			4				4				1			1			8	2	1	2	1	7
27-28			4				4		1			1				2	8		1	2	1	7
29-30			4				4		1			1					10		1	2	2	8
31-32			4				4				1			1			10		1	2	2	8
33-34				4				4	1			1				2	10	2	1	2	2	9
35-36				4				4	1			1					12	2	1	2	2	9
37-38				4				4			1			1			12	2	1	2	2	10
39-40				4				4	1			1				2	12		1	2	2	10
41-42				4				4	1			1					14		1	2	2	11
43-44				4				4			1			1			14		1	2	2	11
45-46			6				6		1			1				2	14		1	2	2	12
47-48			6				6		1			1					16		1	2	2	12
49-50			6				6				1			1			16		1	2	2	13

B MÀN HÌNH


MÀN HÌNH QUẢN LÝ

6602W	6802W	6203W 6203B	2633
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5-6	5-6	5-6	5-6
7-8	7-8	7-8	7-8
9-10	9-10	9-10	9-10
11-12	11-12	11-12	11-12
13-14	13-14	13-14	13-14
15-16	15-16	15-16	15-16
17-18	17-18	17-18	17-18
19-20	19-20	19-20	19-20
21-22	21-22	21-22	21-22
23-24	23-24	23-24	23-24
25-26	25-26	25-26	25-26
27-28	27-28	27-28	27-28
29-30	29-30	29-30	29-30
31-32	31-32	31-32	31-32
33-34	33-34	33-34	33-34
35-36	35-36	35-36	35-36
37-38	37-38	37-38	37-38
39-40	39-40	39-40	39-40
41-42	41-42	41-42	41-42
43-44	43-44	43-44	43-44
45-46	45-46	45-46	45-46
47-48	47-48	47-48	47-48
49-50	49-50	49-50	49-50

GHI CHÚ

Thiết bị 6602W và 6902W chỉ có thể gắn trên bề mặt tường phẳng

HỆ THỐNG CHUÔNG HÌNH GỒM 5 CỔNG VÀO CHO ÂM THANH/VIDEO,
VÀ 1 BẢNG ĐIỀU KHIỂN, VÀ 1 HỆ DÂY CÁP DẪN VÀ 1 HỆ THỐNG
CÓ THỂ MỞ RỘNG BẰNG CÁP QUANG

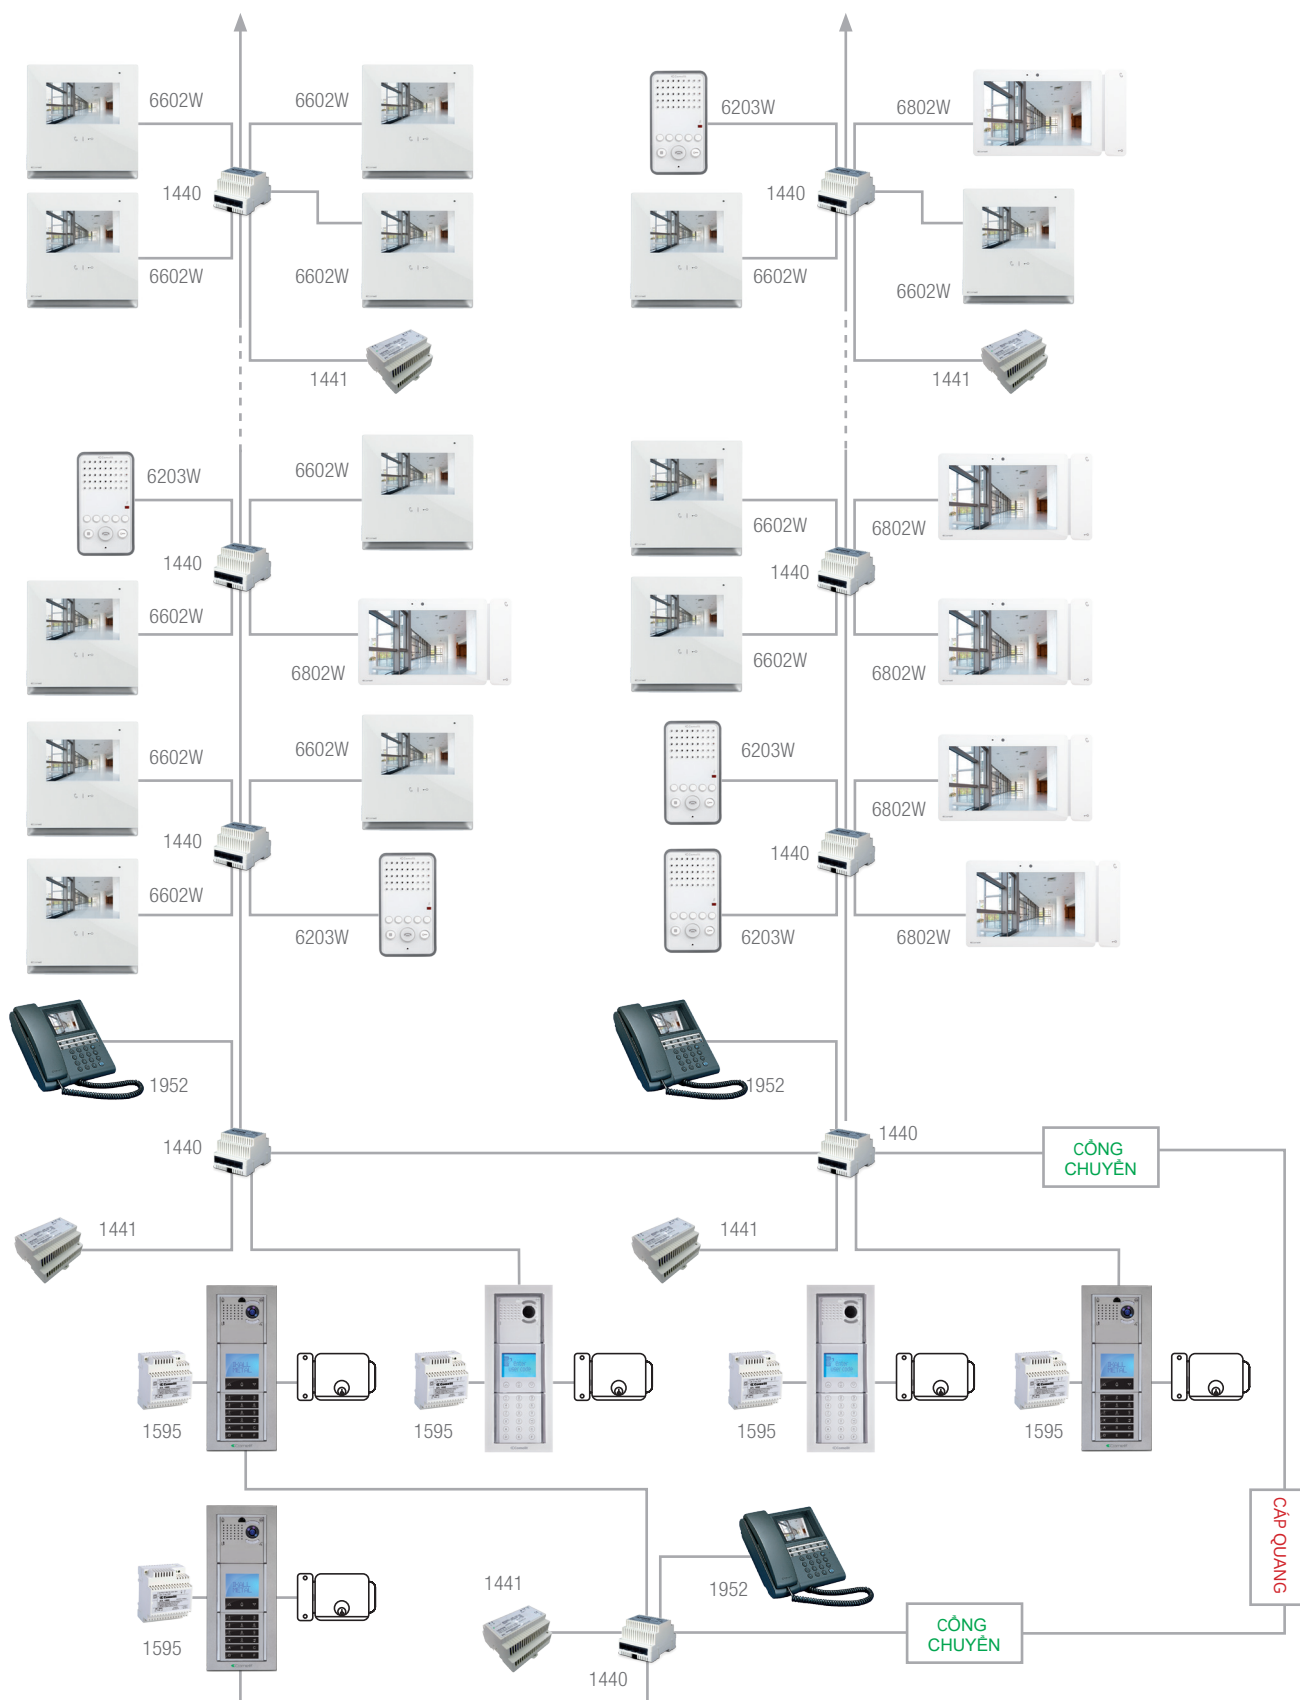





CATALOGUE SẢN PHẨM

HỆ THỐNG VIP

BỘ THIẾT BỊ

41

THIẾT BỊ & PHỤ KIỆN 42

LOA NGHE GỌI

EASYCOM 43

STYLE 44

MÀN HÌNH QUẢN LÝ

MAXI 44

ICONA 45

CHUÔNG HÌNH

3ONE6 TOUCH 46

3ONE6 SENSE 47

3ONE6 ANALOG 47

PHỤ KIỆN CHUÔNG 3ONE6 48

ARCHITECTUS PRO 49

VANDALCOM 50

IKALL METAL 53

IKALL 57

ROMA 62

CHUÔNG KHẨN CẤP 63

EASYCALL 64

PHỤ KIỆN 65



8531

IKALL METAL AND ICONA KIT, GATEWAY SLAVE. H264

The kit consists of 1 ViP kit external panel 4894HIM, 1 power supply unit art. 1595, 1 power supply unit art. 1441B, 1 slave gateway art. 1456S, 1 Icona monitor art. 6602WK, 1 flush-mounted box art. 6117, 1 wall-mounted bracket art. 6620. The kit is pre-programmed and ready to use, except for 1456S gateway configuration which must be carried out via internal web server. The kit can be expanded with other products from the VIP catalogue. Compatible with H.264 video format.



8521

IKALL METAL AND ICONA KIT.VIP H264 SYSTEM

The kit consists of 1 colour audio/video unit art. 4682HKC, 1 module with 1 button art. 33411M, 1 flush-mounted box art. 3110/1, 1 frame complete with finishing frame art. 3311/1S, 1 power supply unit art. 1595, 1 power supply unit art. 1441B, 1 switch art. 1440, 1 Icona monitor art. 6602WK, 1 flush-mounted box art. 6117, 1 wall-mounted bracket art. 6620. The kit is pre-programmed and ready to use. The kit can be expanded with other products from the VIP catalogue. Compatible with H.264 video format.



8513HIM

IKALL METAL AND ICONA KIT.VIP H264 SYSTEM

The kit consists of 1 colour audio/video unit art. 4682HKC, 1 module with 1 button art. 33411M, 1 flush-mounted box art. 3110/1, 1 frame complete with finishing frame art. 3311/1S, 1 power supply unit art. 1595, 1 power supply unit art. 1441B, 1 switch art. 1440, 1 Icona monitor art. 6602WK, 1 flush-mounted box art. 6117, 1 wall-mounted bracket art. 6620. The kit is pre-programmed and ready to use. The kit can be expanded with other products from the VIP catalogue. Compatible with H.264 video format.

SINGLE-FAMILY KIT W/IKALL METAL AND MASTER GATEWAY. VIP H264

The kit consists of 1 ViP kit external panel 4894IM, 1 power supply unit art. 1595, 1 power supply unit art. 1441B and 1 master gateway 1456. The kit is pre-programmed and ready to use, except for 1456 gateway configuration which must be carried out via internal web server. The kit can be expanded with other products from the VIP catalogue.





CATALOGUE SẢN PHẨM

PHỤ KIỆN

**8501HIM**

SINGLE-FAMILY KIT W/IKALL METAL AND MASTER GATEWAY.VIP H264

The kit consists of 1 ViP kit external panel 4894IM, 1 power supply unit art. 1595, 1 power supply unit art. 1441B and 1 master gateway 1456. The kit is pre-programmed and ready to use, except for 1456 gateway configuration which must be carried out via internal web server. The kit can be expanded with other products from the VIP catalogue.

**8504H**

PC INTERCOM KIT WITH VANDALCOM ENTRANCE PANEL - SINGLE USER

The kit consists of 1 colour audio/video unit art. 4682HKC, 1 module with 1 button art. 3268I/1, 1 flush-mounted box art. 3160/1, 1 frame complete with finishing frame art. 3161/1, 1 power supply unit art. 1595 and 1 PC Intercom software art. 1454K. The kit is pre-programmed and ready to use. The kit can be expanded with other products from the VIP catalogue.

PHỤ KIỆN

**4894HIM**

EXTERNAL UNIT FOR VIP KIT - IKALL METAL H264

Single-family video door entry external unit for ViP system with Ikall Metal entrance panel. The kit comprises: 1 flush-mounted box Art. 3110/1, 1 silver coloured frame Art. 3311/1S, 1 module with 1 button art. 33411M and 1 colour audio/video unit Art. 4682HKC. The external unit is coded with ViP address 100 and the button on module Art. 33411M sends the call to ViP address 1. Compatible with H264 video format.

**4682HKC**

COLOUR A/V UNIT FOR VIP SYSTEM, IKALL SERIES. H264

ViP KIT system audio-video unit with terminal block, complete with mini lens colour camera which is adjustable from the front and LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. Dimensions: 102x55x38 mm. Compatible with H.264 video format



LOA NGHE GỌI



EASYCOM



6203B

EASYCOM VIP UNIT - BLACK

Full duplex hands-free intercom with electronic calling, call volume adjustment, privacy, loud speaker volume adjustment and privacy of conversation. Fitted as standard with audio activation push button with active audio LED signalling, door lock command and 6 configurable buttons. White colour. Dimensions: 90 x 160 x 28 mm



6203W

EASYCOM VIP UNIT - WHITE

Full duplex hands-free intercom with electronic calling, call volume adjustment, privacy, loud speaker volume adjustment and privacy of conversation. Fitted as standard with audio activation push button with active audio LED signalling, door lock command and 6 configurable buttons. White colour. Dimensions: 90 x 160 x 28 mm



CATALOGUE SẢN PHẨM

MÀN HÌNH QUẢN LÝ

STYLE




2633

EASYCOM VIP UNIT - WHITE

Full duplex hands-free intercom with electronic calling, call volume adjustment, privacy, loud speaker volume adjustment and privacy of conversation. Fitted as standard with audio activation push button with active audio LED signalling, door lock command and 6 configurable buttons. White colour. Dimensions: 90 x 160 x 28 mm

MAXI



6802W

MAXI SERIES 7" MONITOR. VIP SYSTEM

7" 16:9 touch monitor with full-duplex hands-free audio. Management of Audio distribution and Energy consumption as standard. Audio, ringtone, colour and contrast adjustment. Equipped with a slot to house the micro SD Card. Ringtone can be customised. Equipped with video memory function and internal directory for the management of intercom calls. Management of external floor door call and call repetition as standard. Panic and alarm input. "Sensitive touch" commands with LED backlighting. The audio and door-opening command is always visible, whilst the others appear after touch or swipe contact. Also has button for self-ignition, selectable privacy or doctor button (with red privacy active indicator), and 2 buttons for different uses. "Door Open" and "New Message" indicator lights. Flush or wall-mounted or desk base versions. 223x124x25 mm. Compatible with H264 video format.



6812

DESK BASE FOR MAXI MONITOR

Desk base for desktop conversion of Handsfree Mini monitor. Complete with 1x 2 metre cable with RJ45 connector to connect monitor terminals to the coupler or domestic series socket. Dimensions: 140x190x140mm.



6817

FLUSH-MOUNTED BOX FOR MAXI MONITOR

Flush-mounted box in black ABS. Dimensions: 212x115x50mm



6820

SBC & VIP MAXI MONITOR WALL SUPPORT

Wall support for Maxi monitor. White. Dimensions: 216x117x16 mm.



MÀN HÌNH QUẢN LÝ

ICONA



6602W

ICONA SERIES HANDS-FREE COLOUR MONITOR. VIP SYSTEM. H264

Flush-mounted (on box Art. 6117) or surface-mounted (with bracket Art. 6620) colour monitor with 4.3" 16/9 touch screen and hands-free full-duplex audio. Allows adjustment of backlighting intensity, contrast, audio volume and ringtone volume. Equipped as standard with sensitive touch controls for lock-release, audio activation, self-ignition, privacy service and 3 other controls for programmable functions, and door open and new message indicator LEDs. Standard floor door call and call repetition management, with alarm and panic inputs and micro SD Card slot. You can customise the ringtone and video memory function with an absent message. Can also be used on standard POE systems. Dimensions 142.5x147x23mm. Compatible with H.264 video format.



6117

PLANUX, SMART, ICONA FLUSH BACKBOX

Flush mounted box for Planux, Smart and Icona monitors Dimensions: 132x132x50mm



6612

WALL BRACKET FOR ICONA MONITOR

Wall bracket for Icona monitor. Colour: White. Dimensions: 137X142X12.5 mm.



6620

WANDSTEUN VOOR ICONA MONITOR

Wandsteun voor Icona-monitor. Kleur wit. Afmetingen: 137x142x12,5mm.



6118

PLANUX CLIPS FOR DRY LINED WALLS

Installation kit for plasterboard walls.



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH



30NE6 TOUCH



3454H

VIP 316 TOUCH A/V ENTRANCE PANEL. H264

Stainless steel flush-mounted entrance panel (fitted level with the wall) with 8" capacitive touch screen featuring high visibility and impact-proof glass. Certified as IK08. Operation with configurable graphics (list of names with search, virtual static buttons up to 10 users, alphabetised directory, number code up to 8 digits). Allows customisation of the virtual buttons and viewing of general apartment block messages. Fully configurable via ViP Manager; language, brightness and name/code adjustment can also be carried out locally. Fitted with rfid reader for local door lock control, an additional relay for various uses and proximity and brightness sensors for optimal operational management. Complete with ViP a/v unit Art. 4682HC for audio/video/door lock management and flush-mounted box. To be powered at 33 Vdc using Art. 1596. Dimensions 342x182x3 mm. Compatible with H.264 video format



1596A

POWER SUPPLY UNIT 33 VDC 60W INPUT 110-240 VAC 316 ENTR. PAN

Power supply unit with 110-230V primary and 33Vdc 1.8A continuous output for 316 range entrance panels. Equipped with internal protection against current overload and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).





CHUÔNG HÌNH

3ONE6 SENSE



3452

DIGITAL CAP SENS STAINLESS STEEL A/V ENTRANCE PANEL – VIP

Flush-mounted entrance panel with 3 mm thick stainless steel plate. Complete with 128x64 dot LCD graphic display and 15 buttons integrated into the plate, with no mechanical movement. Also works as access control keypad. Two search buttons are used to scroll through the names; alternatively, the first letter of the required name can be entered. Once the desired username is displayed, simply press the call button. The call can also be made by directly entering the user code. It can also be used to customise an initial welcome message and can operate with a dual user interface language. Integrated RFID reader which can be used in conjunction with Simplekey. Complete with VIP a/v unit part. 4682HC for audio/video/door lock management, and flush-mounted box with concealed fixing screws. Dimensions 342x182x3 mm. IK08 certified.



3459

RAINSHIELD WITH LEDS FOR 316 SENSE ST. STEEL ENT. PANEL

Rain shield for 316 series panels.




1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

Power supply unit 110-230V input and 33Vdc 500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).

3ONE6 ANALOG

**3ONE6 ANALOG AUDIO PANEL VIP**


Flush-mounted entrance panel with 3 mm thick stainless steel plate; buttons integrated into the plate, with no mechanical movement. Name card holders with LED lighting and front access for name replacement. Complete with VIP audio unit part. 1682 for audio/door lock management, and flush-mounted box with concealed fixing screws. To be powered at 33 Vdc using part. 1595. IK08 certified.

Code	N. Buttons	Dimensions
3201XA	1	247x182x3 mm
3202XA	2	247x182x3 mm
3203XA	3	293x182x3 mm
3204XA	4	293x182x3 mm
3205XA	5	342x182x3 mm
3206XA	6	342x182x3 mm
3207XA	7	408x182x3 mm
3208XA	8	408x182x3 mm
3209XA	9	408x182x3 mm
3210XA	10	477x182x3 mm
3211XA	11	477x182x3 mm
3212XA	12	477x182x3 mm



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH



30NE6 ANALOG A/V PANEL VIP H264

Flush-mounted entrance panel (fitted level with the wall) and plate in 3mm thick stainless steel; buttons integrated into the plate, with no mechanical movement. IK08 certification. Nameplates with LED lighting and front access for name replacement. Allows management of visual call, conversation and door lock status indications. Complete with a/v VIP unit Art. 4682HC for audio/video/door lock management, and flush-mounted box with concealed fixing screws. For powering at 33Vdc with Art. 1595.

Code	N. Buttons	Dimensions
3201HXV	1	247x182x3 mm
3202HXV	2	247x182x3 mm
3203HXV	3	293x182x3 mm
3204HXV	4	293x182x3 mm
3205HXV	5	342x182x3 mm
3206HXV	6	342x182x3 mm
3207HXV	7	408x182x3 mm
3208HXV	8	408x182x3 mm
3209HXV	9	408x182x3 mm
3210HXV	10	477x182x3 mm
3211HXV	11	477x182x3 mm
3212HXV	12	477x182x3 mm

PHỤ KIỆN 30NE6



3458

ACCESS CONTROL ACCESSORY MODULE FOR EXTERNAL UNITS, 30NE6

Flush-mounted 3 mm thick stainless steel plate for housing the access control module. Can be used in conjunction with all entrance panels in the 316 range. Dimensions 88x182x3 mm



FLUSH-MOUNTED BOX ENT.PANELS. 30NE6 SERIES

Flush-mounted box for 1- and 2-button ent. panels from 316 Analog series. Dimensions: 164x227,5x56 mm

Artikelnr.	Aant. toetsen	Afmetingen
3460/2	1 - 2	164x227,5x56 mm
3460/4	3 - 4	164x273,5x56 mm
3460/6	5 - 6	164x323x56 mm
3460/9	7 - 8 - 9	164x388,5x56 mm
3460/12	10 - 11 - 12	164x457,5x56 mm

3462/2

WALL-MOUNTED HOUSING SERIES 316 1 & 2 BUT. PANEL

Stainless steel accessory for wall-mounted 316 series entrance panels with 1 or 2 buttons. Dimensions 180x245x57 mm

3462/4

WALL-MOUNTED HOUSING SERIES 316 3 & 4 BUT. PANEL

Stainless steel accessory for wall-mounted 316 series entrance panels with 3 or 4 buttons. Dimensions 180x290x57 mm

3462/6

WALL HOUSING FOR TOUCH-SENSE & 5-6 BUTT.ENT.PAN. 316 SERIES

Stainless steel accessory for wall-mounted entrance panels Art. 3451, 3451/A, 3452, 3453, 3454. Dimensions 180x340x57 mm



CHUÔNG HÌNH

ARCHITECTUS PRO



3472

SENSE MODULE VIP SYSTEM ARCHITECTUS-PRO

Flush-mounted entrance panel with 3 mm thick stainless steel plate. Complete with 128x64 dot LCD graphic display and 15 buttons integrated into the plate, with no mechanical movement. Also works as access control keypad. Two search buttons are used to scroll through the names; alternatively, the first letter of the required name can be entered. Once the desired username is displayed, simply press the call button. The call can also be made by directly entering the user code. It can also be used to customise an initial welcome message and can operate with a dual user interface language. Integrated RFID reader which can be used in conjunction with Simplekey. Complete with VIP a/v unit part. 4682C for audio/video/door lock management, and flush-mounted box with concealed fixing screws. Dimensions 342x182x3 mm. IK08 certified.



3474

TOUCH MODULE VIP SYSTEM ARCHITECTUS-PRO


Stainless steel flush-mounted entrance panel with 7" capacitive touch screen with impact-proof glass. IK08 certified. Configurable graphics (list of names with search, up to 60 virtual buttons (or 10 with images, name directory, access codes up to 8 digits). Integrated RFID reader which can be used in conjunction with Simplekey. Users and settings are simple to program using VIP Manager part. 1449. It is compatible with all VIP products and functions. Pre-assembled with VIP a/v unit part. 4682C for audio/video/door lock management, and flush-mounted box with concealed fixing screws. Dimensions 342x182x3 mm.



3476

MODULE A/V VIP SYSTEM ARCHITECTUS-PRO


Flush-mounted audio/video module (fitted level with the wall) and 3 mm thick stainless steel plate. Complete with Art. 4682C for audio/video/door lock management. Allows management of visual call, conversation and door lock status indications. Dimensions 184x184x3 mm



3478

MODULE AUDIO VIP SYSTEM ARCHITECTUS-PRO

Flush-mounted audio module (fitted level with the wall) and 3 mm thick stainless steel plate. Complete with Art. 1682 for audio/door lock management. Allows management of visual call, conversation and door lock status indications. Dimensions 184x184x3 mm



3479

MODULE FOR SIMPLEKEY READER ARCHITECTUS-PRO

Flush-mounted module (fitted level with the wall) and 3 mm thick stainless steel plate for access control module housing. Dimensions 184x184x3 mm



3481

MODULE 1 BUTTON SB/VIP BLANK NAMEPLATE ARCHITECTUS-PRO

Flush-mounted button module (fitted level with the wall) and 3 mm thick stainless steel plate; buttons integrated into the plate, with no mechanical movement. Name card holders with LED lighting and front access for name replacement. Dimensions 184x184x3 mm

3482

MODULE 1 BUTTON SB/VIP BLANK NAMEPLATE ARCHITECTUS-PRO

Flush-mounted button module (fitted level with the wall) and 3 mm thick stainless steel plate; buttons integrated into the plate, with no mechanical movement. Name card holders with LED lighting and front access for name replacement. Dimensions 184x184x3 mm



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH



3483

MODULE 3 BUTTON SB/VIP BLANK NAMEPLATE ARCHITECTUS-PRO

Flush-mounted button module (fitted level with the wall) and 3 mm thick stainless steel plate; buttons integrated into the plate, with no mechanical movement. Name card holders with LED lighting and front access for name replacement. Dimensions 184x184x3 mm



3489

CUSTOMISED NAMEPLATE ARCHITECTUS-PRO

Customised engraved stainless steel nameplate. Available on request

VANDALCOM



3159

VANDALCOM SERIES STAINLESS STEEL SURFACE-MOUNTED HOUSING

Modules	Code	Dimensions
3159/1	1	142x142x58mm
3159/2	2	142x254x58mm
3159/3	3	142x366x58mm



3160

FLUSH-MOUNTED BOX FOR VANDALCOM ENTRANCE PANEL


Modules	Code	Dimensions
3160/1	1	130x130x58mm
3160/2	2	130x242x58mm
3160/3	3	130x354x58mm



3161

VANDALCOM SERIES FRAME. DARK GREY COLOUR

Modules	Code	Dimensions
3161/1	1	143x143x18mm
3161/2	2	143x255x18mm
3161/3	3	143x367x18mm



3161/A

VANDALCOM SERIES FRAME. STEEL GREY COLOUR

Modules	Code	Dimensions
3161/1A	1	143x143x18mm
3161/2A	2	143x255x18mm
3161/3A	3	143x367x18mm



CHUÔNG HÌNH



3262S	MODULE FOR AUDIO UNITS Module made using double 2.5 mm 316 stainless steel plate. For use with audio unit depending on the wiring system used.		
	Modules	Code	Dimensions
	3262S/0	0	106x106x44mm
	3262S/1	1	106x106x44mm
	3262S/2	2	106x106x44mm



3268S	MODULE FOR A/V UNITS Module made using double 2.5 mm 316 stainless steel plate. For use with audio/video unit depending on the wiring system used.		
	Modules	Code	Dimensions
	3268S/0	0	106x106x44mm
	3268S/1	1	106x106x44mm
	3268S/2	2	106x106x44mm



3064S	4-BUTTON MODULE, VANDALCOM SERIES Module made using double 2.5 mm 316 stainless steel plate. 4-button module. Dimensions 106x106x30 mm		
-------	--	--	--



3070S	DIGITAL CALL MODULE, VANDALCOM SERIES Module made using double 2.5 mm 316 stainless steel plate, complete with keypad featuring 12 backlit buttons and 16-digit alphanumeric display showing call codes and user interaction messages (busy, etc.). Also functions as an electronic key code with 1000 possible different 6-digit command codes. Dimensions: 106x106x56 mm.		
-------	---	--	--



3072S	DIGITAL DIRECTORY MODULE, VANDALCOM SERIES Module made using double 2.5 mm 316 stainless steel plate, complete with 4 backlit buttons and 32-digit alphanumeric display. Stores up to 1000 user names. Scroll through names using 2 search buttons. Once the name is displayed, simply press the call button. Dimensions: 106x106x56 mm.		
-------	--	--	--



3176S	STEEL BLANK MODULE, VANDALCOM SERIES Made using double 2.5 mm stainless steel plate. Dimensions: 106x106x9 mm		
-------	---	--	--



3179S	MODULE FOR SIMPLEKEY READER, VANDALCOM SERIES Module made using double 2.5 mm 316 stainless steel plate, with facility for housing SimpleKey units SK9000I-SK9001I-SK9030I. Dimensions: 106x106x9 mm		
-------	--	--	--



3186S	INDICATION/NAMEPLATE MODULE, VANDALCOM SERIES Module made using double 2.5 mm 316 stainless steel plate. Complete with white label for general information (house no., etc.) and pre-printed label with space for 12 user names. Dimensions: 106x106x9 mm.		
-------	--	--	--



3188S	VANDALCOM ELECTRONIC KEY FOR PW AND IKALL UNITS Module made using double 2.5 mm 316 stainless steel plate. Complete with backlit keypad. Features 300 different 8-digit codes that can be programmed from the keypad to control two relays (10A), as well as a confirm request buzzer and relay activation LED. Relay closure time can be set from the keypad. Dimensions: 106x106x56 mm.		
-------	---	--	--



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH



SK9001I

SIMPLEKEY ADVANCED READER IKALL

Simplekey Advanced access control unit, complete with Mifare proximity reader + control unit. Hermetic PVC case to be fitted to various entrance panels. Capacity:1500 keys. System programming through USB Encoder and Simplekey Advanced SK9091 software. LED for system status indication. Recording of the previous 1,400 events. Option to create complex building systems without the need for a physical connection. Relay closing timer: from 1 to 60 seconds, 5 second default. 12-24 V DC/AC or 33V DC power supply unit from part. 1595.



1172B

LED BULB FOR EXTERNAL UNITS

LED bulb for nameplate lighting.



1682

IKALL VIP AUDIO ONLY SPEAKER

Audio-video unit for VIP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.



1682HVC

IKALL SERIES AUDIO MOD. FOR REM.COL.CAM. VIP. H264

ViP system audio unit with facility for connection of a remote camera with 12Vdc power supply. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. Dimensions: 102x55x38 mm. Compatible with H.264 video format.



4682HC

COL.AUD/VID UNIT FOR VIP SYST., IKALL SERIES.H264

Audio-video unit for ViP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.



4682HCW

D&N WIDE COL.A/V UNIT. VIP SYS. IKALL SERIES. H264


Audio-video unit for ViP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.



1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

Power supply unit 110-230V input and 33Vdc 500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).



1219

NAME TAG SHEETS FOR VANDALCOM ENTRANCE PANEL

The kit contains 10 sheets of adhesive labels for nameplates, 7 sheets for information modules.





CHUÔNG HÌNH

IKALL METAL



MODULE FLUSH MOUNT BACK BOX

	Modules	Code	Dimensions
3110	3110/1	1	118x118x45mm
	3110/2	2	118x207x45mm
	3110/3	3	118x297x45mm
	3110/4	4	118x387x45mm



MODULE-HOLDER FRAME COMPLETE WITH FINISHING CORNICE

	Modules	White	Anthracite	Silver	Dimensions
3311	1	3311/1W	3311/1A	3311/1S	125x125x37,5mm
	2	3311/2W	3311/2A	3311/2S	125x215x37,5mm
	3	3311/3W	3311/3A	3311/3S	125x305x37,5mm
	4	3311/4W	3311/4A	3311/4S	125x395x37,5mm




RAIN SHIELD FOR ENTRANCE PANEL

Natural anodised aluminum rain shield Ikall panel

Modules	Code	Dimensions
31121	1	154x152x44mm
31122	2	154x242x44mm
31123	3	154x332x44mm
31124L	4L*	154x422x44mm

*4 vertically-aligned modules



IKALL NATURAL ANODISED ALUMINIUM FINISHING FRAME

Artikelnr.	Modules	Afmetingen
31141	1	149x149x3mm
31142	2	149x239x3mm
31143	3	149x329x3mm
31144L	4L*	419x419x3mm

*4 vertically-aligned modules



IKALL NATURAL ANODISED ALUMINIUM HOUSING WITH RAIN SHIELD.

Modules	Code	Dimensions
31161	1	154x152x85mm
31162	2	154x242x85mm
31163	3	154x332x85mm
31164L	4L*	154x422x85mm

*4 vertically-aligned modules



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH



PILLAR FOR ENTRANCE PANEL, HEIGHT 170 CM

Extruded aluminium pillar with steel coloured finish, aluminium rain shield and floor-mounted base, bolts provided.

3639	Code	Modules	Dimensions
	3639/1	1	18x170x7,5cm
	3639/2	2	18x170x7,5cm
	3639/3	3	18x170x7,5cm

PILLAR FOR ENTRANCE PANEL, HEIGHT 117 CM

Extruded aluminium pillar with steel coloured finish, aluminium rain shield and floor-mounted base, bolts provided.

3640	Code	Modules	Dimensions
	3640/1	1	18x117x7,5cm
	3640/2	2	18x117x7,5cm
	3640/3	3	18x117x7,5cm

1 MODULE 45° ANGLED ENTRANCE PANEL HOUSING

Aluminium housing which allows entrance panels to be installed at 45°. Once fitted to the wall, the housing angles the entrance panel laterally towards the user for easier and practical use.

3649	Code	Modules	Dimensions
	3649/1	1	183x130x100mm
	3649/2	2	183x242x100mm
	3649/3	3	183x354x100mm

IKALL METAL AUDIO MODULE - 0 BUTTONS

Module designed for audio speaker unit, with stainless steel finish. To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

33401M	IKALL METAL AUDIO MODULE - 1 BUTTON
	Module designed for audio speaker unit, with stainless steel finish. Nameplates with LED lighting (options: blue, white or off). To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

IKALL METAL AUDIO MODULE - 2 BUTTONS

Module designed for audio speaker unit, with stainless steel finish. Nameplates with LED lighting (options: blue, white or off). To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

33402M	IKALL METAL AUDIO MODULE - 2 BUTTONS
	Module designed for audio speaker unit, with stainless steel finish. Nameplates with LED lighting (options: blue, white or off). To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

IKALL METAL VIDEO MODULE - 0 BUTTONS

Audio/video module with stainless steel finish. Combine with matching Audio/Video module, depending on applied cabling. Dimensions 112x89, 5x32 mm.

33410M	IKALL METAL VIDEO MODULE - 0 BUTTONS
	Audio/video module with stainless steel finish. Combine with matching Audio/Video module, depending on applied cabling. Dimensions 112x89, 5x32 mm.

IKALL METAL VIDEO MODULE - 1 BUTTON

Audio/video module with stainless steel finish. Name plate with LED backlight, a choice of blue, white or off. Combine with matching Audio/Video module, depending on applied cabling. Dimensions 112x89, 5x32 mm.

33411M	IKALL METAL VIDEO MODULE - 1 BUTTON
	Audio/video module with stainless steel finish. Name plate with LED backlight, a choice of blue, white or off. Combine with matching Audio/Video module, depending on applied cabling. Dimensions 112x89, 5x32 mm.

IKALL METAL VIDEO MODULE - 2 BUTTONS

Audio/video module with stainless steel finish. Name plate with LED backlight, a choice of blue, white or off. Combine with matching Audio/Video module, depending on applied cabling. Dimensions 112x89, 5x32 mm.

33412M	IKALL METAL VIDEO MODULE - 2 BUTTONS
	Audio/video module with stainless steel finish. Name plate with LED backlight, a choice of blue, white or off. Combine with matching Audio/Video module, depending on applied cabling. Dimensions 112x89, 5x32 mm.

IKALL METAL SB2 3 BUTTON MODULE

IKALL entrance panel 3-button module for Simplebus and VIP systems, with stainless steel finish. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x40 mm.

33433M	IKALL METAL SB2 3 BUTTON MODULE
	IKALL entrance panel 3-button module for Simplebus and VIP systems, with stainless steel finish. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x40 mm.



CHUÔNG HÌNH



33434M

IKALL METAL SB 4 BUTTON MODULE

IKALL entrance panel 4-button module for Simplebus and VIP systems, with stainless steel finish. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x40 mm.



33436M

IKALL METAL SB 6 BUTTON MODULE

IKALL entrance panel 6-button module for Simplebus and VIP systems, with stainless steel finish. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x40 mm.



3334M

IKALL METAL BLANK MODULE

Blank module with stainless steel finish. Dimensions 112x89.5x22 mm.



3336M

IKALL METAL INDICATOR MODULE

LED-backlit module providing various indications, with stainless steel finish. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x39.



3339M

IKALL METAL NAME PLATE


LED-backlit module displaying a list of names or user codes (max. 12). Stainless steel finish; blue/white/off nameplate lighting options. Dimensions 112x89.5x39.



3348M

IKALL METAL CODED ACCESS MODULE

Digital electronic key module with LED keypad backlighting. Blue, white and off lighting options; stainless steel finish. When a number with between 1 and 8 digits is entered on the keypad, two relays (10A) are activated, allowing electric door locks or other devices to be operated. 12 V AC/DC power supply. Dimensions 112x89.5x40 mm.



3349M

IKALL METAL SIMPLEKEY CUT-OUT

Module set up for use with Simplekey reader Art. SK9000I. Stainless steel finish. Dimensions 112x89.5x22 mm



3360BM

2-WIRE AND VIP CALL MODULE. IKALL METAL

Digital call module with 128x64 dot graphic LCD display and keypad with 21 buttons backlit with blue LEDs. Also functions as an electronic key code. Two search buttons are used to scroll through the names; alternatively, the first letter of the required name can be entered. Once the desired username is displayed, simply press the call button. The call can also be made by directly entering the user code. It can also be used to customise an initial welcome message and can operate with a dual user interface language. It can be used in conjunction with Simplekey electronic keys for automatic updating of names in the directory. For the SBC system (factory setting), the electronic name directory saves up to 3500 user names and 6000 lock-release passwords. Users and settings are simple to program using PC software art. 1249B (included, with USB connection cable) via a USB or RS485 port, or locally on the digital module itself. Includes the CD-ROM loaded with serial download SW art. 1249B for installation to PC and the USB connection cable. Dimensions: 112x180x40



1682

IKALL VIP AUDIO ONLY SPEAKER

Audio-video unit for ViP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.

1682HVC

IKALL SERIES AUDIO MOD. FOR REM.COL.CAM. VIP. H264

ViP system audio unit with facility for connection of a remote camera with 12Vdc power supply. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. Dimensions: 102x55x38 mm. Compatible with H.264 video format.



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH



4682HC

COL.AUD/VID UNIT FOR VIP SYST., IKALL SERIES.H264


Audio-video unit for ViP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.



4682HCW

D&N WIDE COL.AV UNIT. VIP SYS. IKALL SERIES. H264

Audio-video unit for ViP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm



1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

Power supply unit 110-230V input and 33Vdc 500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).

1218

NAME TAG SHEETS FOR IKALL ENTRANCE PANEL

The kit contains 20 sheets of adhesive labels for single nameplates, 7 sheets for double nameplates and 1 sheet for information modules.

IKALL



3110

INBOUWDOOS VOOR DEURSTATION

Modules	Code	Dimensions
3110/1	1	118x118x45mm
3110/2	2	118x207x45mm
3110/3	3	118x297x45mm
3110/4	4	118x387x45mm



3311

MODULE-HOLDER FRAME COMPLETE WITH FINISHING CORNICE

Modules	White	Anthracite	Silver	Dimensions
1	3311/1W	3311/1A	3311/1S	125x125x37,5mm
2	3311/2W	3311/2A	3311/2S	125x215x37,5mm
3	3311/3W	3311/3A	3311/3S	125x305x37,5mm
4	3311/4W	3311/4A	3311/4S	125x395x37,5mm



3311/AL

ANODIZES ALUMINIUM FRAME

Anodized aluminum frame ideal for installation in extreme situations such as the marine environment.

Modules	Code	Dimensions
3311/1AL	1	125x125x37,5mm
3311/2AL	2	125x215x37,5mm
3311/3AL	3	125x305x37,5mm
3311/4AL	4	125x395x37,5mm




CHUÔNG HÌNH

**RAIN SHIELD FOR ENTRANCE PANEL**

Natural anodised aluminum rain shield Ikall panel

Modules	Code	Dimensions
31121	1	154x152x44mm
31122	2	154x242x44mm
31123	3	154x332x44mm
31124L	4L*	154x422x44mm

*4 vertically-aligned modules

**IKALL NATURAL ANODISED ALUMINIUM FINISHING FRAME**

Modules	Code	Dimensions
31141	1	149x149x3mm
31142	2	149x239x3mm
31143	3	149x329x3mm
31144L	4L*	419x419x3mm

*4 vertically-aligned modules

**IKALL NATURAL ANODISED ALUMINIUM HOUSING WITH RAIN SHIELD**

Modules	Code	Dimensions
31161	1	154x152x85mm
31162	2	154x242x85mm
31163	3	154x332x85mm
31164L	4L*	154x422x85mm

*4 vertically-aligned modules

**PILLAR FOR ENTRANCE PANEL, HEIGHT 170 CM**

Extruded aluminium pillar with steel coloured finish, aluminium rain shield and floor-mounted base, bolts provided.

3639	Modules	Code	Dimensions
	3639/1	1	18x170x7,5cm
	3639/2	2	18x170x7,5cm
	3639/3	3	18x170x7,5cm

PILLAR FOR ENTRANCE PANEL, HEIGHT 117 CM

Extruded aluminium pillar with steel coloured finish, aluminium rain shield and floor-mounted base, bolts provided.

3640	Modules	Code	Dimensions
	3640/1	1	18x117x7,5cm
	3640/2	2	18x117x7,5cm
	3640/3	3	18x117x7,5cm

**1 MODULE 45° ANGLED ENTRANCE PANEL HOUSING**

Aluminium housing which allows entrance panels to be installed at 45°. Once fitted to the wall, the housing angles the entrance panel laterally towards the user for easier and practical use.

3649	Modules	Code	Dimensions
	3649/1	1	183x130x100mm
	3649/2	2	183x242x100mm
	3649/3	3	183x354x100mm

**ZERO-BUTTON AUDIO MODULE WITH BLACK FACEPLATE**

Module designed for audio speaker unit, with black screen-printed faceplate. To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH

**33401****IKALL AUDIO MODULE - 1 BUTTON**

Module designed for audio speaker unit, with black screen-printed faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

**33401A****IKALL SERIES 1-BUTTON MODULE FOR AUDIO UNIT - METAL**

Module designed for audio speaker unit, with stainless steel finish faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

**33402****IKALL AUDIO MODULE - 2 BUTTONS**

Module designed for audio speaker unit, with black screen-printed faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

**33402A****IKALL SERIES 2-BUTTON MODULE FOR AUDIO UNIT - METAL**

Module designed for audio speaker unit, with stainless steel finish faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with an audio speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

**33410****IKALL VIDEO MODULE - 0 BUTTONS**

Module designed for audio/video speaker unit, with black screen-printed faceplate. To be fitted with a suitable video entry speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

**33411****IKALL VIDEO MODULE - 1 BUTTON**

Module designed for audio/video speaker unit, with black screen-printed faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with a suitable video entry speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

**33411A****IKALL SERIES 1-BUTTON MODULE FOR AUDIO/VIDEO UNIT - METAL**

Module designed for audio/video speaker unit, with stainless steel finish faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with a suitable door entry speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.

**33412****IKALL VIDEO MODULE - 2 BUTTONS**

Module designed for audio/video speaker unit, with black screen-printed faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with a suitable video entry speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.





CHUÔNG HÌNH



33412A

IKALL SERIES 2-BUTTON MODULE FOR AUDIO/VIDEO UNIT - METAL

Module designed for audio/video speaker unit, with stainless steel finish faceplate. Nameplates with LED lighting (options: blue, white or off). To be fitted with a suitable door entry speaker unit depending on the cabling system used. Dimensions 112x89.5x32 mm.



33433

IKALL SIMPLEBUS 3 BUTTON MODULE

3-button IKALL entrance panel module for Simplebus system. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x40 mm.



33434

IKALL SIMPLEBUS 4 BUTTON MODULE

4-button IKALL entrance panel module for Simplebus system. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x40 mm.



33436

IKALL SIMPLEBUS 6 BUTTON MODULE

6-button IKALL entrance panel module for Simplebus system. Nameplate lighting options: blue/white/off. Dimensions 112x89.5x40 mm.



3334

PLAIN MODULE WITH BLACK FACEPLATE

Plain module with black faceplate. Dimensions 112x89.5x22 mm.



3336

LIT MODULE. IKALL SERIES. SB SYSTEM

LED backlight module for various indications. Nameplate lighting options: blue/white/off. Contains card for writing names and user codes (max. 12). Dimensions 112x89,5x39 mm).



3348

IKALL CODED ACCESS MODULE

Access control keypad with LED backlighting. Options: blue, white and off. When a number with between 1 and 8 digits is entered on the keypad, two relays (10A) are activated, allowing electric door locks or other devices to be operated. 12 V AC/DC power supply. Dimensions: 112x89,5x40 mm.



3349

IKALL SIMPLEKEY CUT-OUT

Module set up for use with Simplekey reader part. SK9000I, SK9001I and SK9030I. Dimensions 112x89,5x22 mm.



CATALOGUE SẢN PHẨM

CHUÔNG HÌNH



3360B

2-WIRE AND VIP CALL MODULE. IKALL SERIES

Digital call module with 128x64 dot graphic LCD display and keypad with 21 buttons backlit with blue LEDs. Also functions as an electronic key code. Two search buttons are used to scroll through the names; alternatively, the first letter of the required name can be entered. Once the desired username is displayed, simply press the call button. The call can also be made by directly entering the user code. It can also be used to customise an initial welcome message and can operate with a dual user interface language. It can be used in conjunction with Simplekey electronic keys for automatic updating of names in the directory. For the SBC system (factory setting), the electronic name directory saves up to 3500 user names and 6000 lock-release passwords. Users and settings are simple to program using PC software art. 1249B (included, with USB connection cable) via a USB or RS485 port, or locally on the digital module itself. Includes the CD-ROM loaded with serial download SW art. 1249B for installation to PC and the USB connection cable. Dimensions: 112x180x40



1682

IKALL VIP AUDIO ONLY SPEAKER

Audio-video unit for VIP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.



1682HVC

IKALL SERIES AUDIO MOD. FOR REM.COL.CAM. VIP. H264

VIP system audio unit with facility for connection of a remote camera with 12Vdc power supply. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. Dimensions: 102x55x38 mm. Compatible with H.264 video format.



4682HC

COL.AUD/VID UNIT FOR VIP SYST., IKALL SERIES.H264

Audio-video unit for VIP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.

4682HCW

D&N WIDE COL.A/V UNIT. VIP SYS. IKALL SERIES. H264


Audio-video unit for VIP system including terminal block complete with front-adjustable mini lens colour camera, LED camera lighting. Complete with terminal block and digital audio management system with Echo-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume adjustable from the front. For fitting in modules: part. 33410, 33411 and 33412. Dimensions: 102x55x38 mm.



1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

Power supply unit 110-230V input and 33Vdc 500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).



1218

NAME TAG SHEETS FOR IKALL ENTRANCE PANEL

The kit contains 20 sheets of adhesive labels for single nameplates, 7 sheets for double nameplates and 1 sheet for information modules.





CHUÔNG HÌNH

CHUÔNG THOÁT HIỂM



3460EA

AUDIO ENTRANCE PANEL FOR EMERGENCY CALLS. VIP SYSTEM

Stainless steel panel with a single call button and indicator LEDs for call forwarded and call answered. Complete with audio/video module Art. 4682C for ViP system and flush-mounted box. "EMERGENCY" model with Braille text. Can be wall-mounted using accessory Art. 3461. Dimensions 229x180x3 mm. IP54 certified.



3460HEV

VIDEO ENT. PANEL FOR EMERGENCY CALLS. VIP SYSTEM. H264

Stainless steel entrance panel with a single call button and indicator LEDs for call forwarded and call answered. Complete with audio/video module Art. 4682C for ViP system and flush-mounted box. "EMERGENCY" model with Braille text. Can be wall-mounted using accessory Art. 3461. Dimensions 229x180x3 mm. Compatible with H.264 video format. IP54 certified.



3460HA

AUDIO HELP POINT PUSHBUTTON ENTRANCE PANEL. VIP SYSTEM

Stainless steel panel with a single call button and indicator LEDs for call forwarded and call answered. Complete with audio module Art. 1682 for ViP system and flush-mounted box. "HELP POINT" model. Can be wall-mounted using accessory Art. 3461. Dimensions 229x180x3 mm. IP54 certified.



3460HHV

VIDEO HELP POINT ENTRANCE PANEL. VIP SYSTEM H264

Stainless steel entrance panel with a single call button and indicator LEDs for call forwarded and call answered. Complete with audio/video module Art. 4682C for ViP system and flush-mounted box. "HELP POINT" model. Can be wall-mounted using accessory Art. 3461. Dimensions 229x180x3 mm. Compatible with H.264 video format. IP54 certified.



3461

WALL HOUSING FOR EMERGENCY AND HELP POINT PANELS

Stainless steel accessory for wall-mounted entrance panels Art. 3460EA, 3460HEV, 3460HA, 3460HHV. Dimensions 176x227x57 mm

EASYCALL



4894E

EASYCALL INTERNAL 1 BUTTON ENTRANCE PANEL FOR VIP SYSTEM

Internal entrance panel equipped with call button. Metal finish. Surface-mounted installation. Dimensions: 90x160x28 mm



CATALOGUE SẢN PHẨM

PHỤ KIỆN

PHỤ KIỆN



1437

VIP SCAN PROTECTOR

Device protecting the ViP system. If the device is fitted in the system, it will be necessary to provide credentials in order to use the ViP Manager software. Observe the instructions given in the technical documentation during use and programming. RJ45 connector. Dimensions: 66x85x35 mm (4 DIN modules).



1439

SERVER/CLIENT BRIDGE FOR VIP SYSTEM

Allows interconnection of ViP devices and/or systems located at different sites. Can be configured as a Server or Client. The interconnection of two sites requires 2 devices: the first configured as a server and the second as a client. Possibility to work with or without VPN connection between sites. Comes equipped with a power supply unit.



1440

NETWORK SWITCH 4 PORT

PoE Ethernet switch with 2 ports (10/100 Mb) and 4 ports (10 MB). Dimensions 66 x 85 x 35 mm



1441

RISER POWER SUPPLY VIP 120W

230Vac/110Vac 100W power supply unit - 55Vdc with DIN bar (6 modules). Dimensions 99 x 93 x 53 mm



1441A

VIP SYSTEM 120W RISER POWER SUPPLY UNIT

230Vac/110Vac 120W power supply unit - 55Vdc with DIN bar (4 modules). Dimensions 65 x 125 x 107 mm



1441B

30W VIP SYSTEM POWER SUPPLY UNIT

Power supply unit with 110Vac/240Vac input and 48Vdc output. 30W power. DIN bar power supply unit (4 DIN modules). Dimensions: 72x93x56mm



1443

VIP SYSTEM RELAY ACTUATOR MODULE

Intelligent device for commanding one 10A relay (local) for general use. RJ 45 connector Dimensions: 66 x 85 x 35 mm (4 DIN modules).



1445H

VIP SYSTEM REMOTE CAMERA MODULE H264

This modulates and sends the video signals received from 4 cameras. RJ 45 connector. Dimensions: 60x85x35mm (4 DIN modules). Compatible with H.264 video format



1446H

VIP SYSTEM PAL OR NTSC VIDEO OUTPUT MODULE H264

Module that generates system output video signal in PAL or NTSC format. RJ45 connector. Dimensions: 60x85x35mm (4 DIN modules). Compatible with H.264 video format.



1447

10/100MB ACTIVE REPEATER MODULE VIP

10/100Mb active repeater module. Local power supply is not required. Up to 8 'cascaded' devices can be connected. 2 RJ45 ports. Dimensions: 60 x 85 x 35 mm (4 DIN modules).



1448

SWITCHBOARD SOFTWARE FOR PC FOR VIP SYSTEM

Software on USB micro-key for simple management and control of all the typical functions of the porter switchboard. In addition to the classic functions of ViP video door entry monitors, it receives and forwards audio/video calls and manages alarms in the apartments; it has a directory of actuators, internal and external units which, when programmed, easily identify the apartment and the external unit which made the call. It also has a recordings archive which stores all calls (made, managed, lost and forwarded) from internal/external units and alarms. It can also send messages to internal units. The software comes with a user license. To work correctly, the USB micro-key must always be inserted in the computer.



1449

RJ45 ETHERNET CABLE, 4-POLE CONNECTION. LENGTH 2M

RJ45 Ethernet cable, 4-pole connection, length 2 metres. For connecting switch 1440 to the PC.





PHỤ KIỆN



1450

VIP BARCODE READER FOR DEVICES


Bar code reader for scanning the MAC address of the device to be programmed onto the VIP system. Fitted with interface and USB cable for connection to a PC.



1451A

POE POWER SUPPLY UNIT FOR VIP SYSTEM MONITOR

PoE Injector for one device



1452

VIP REMOTE CONNECTION INTERFACE

The interface connected to the VIP system allows the system to be managed remotely with VIP manager software part. 1449 or Communications manager software part. 1449CM, via an Internet connection. A router with an Internet connection must be connected to the system.



1454

PC INTERCOM

Software allowing for a PC or Mac to be used as a video intercom. To be installed and used on a PC or Mac connected to the system. Compatible from Snow Leopard version 10.6 or higher.

1454K

LOCAL PC DOOR ENTRY MONITOR SOFTWARE VIP

Software on USB stick that allows a PC to be used for answering calls like a door entry monitor. Pre-set for operation with the single-family VIP KIT Art. 8501. For installation and use on a PC wired directly to the system.



1456

MASTER APARTMENT GATEWAY

Apartment gateway in master version (does not require presence of door entry monitors). Allows the operation of door entry monitor system via tablets and smartphones using the Comelit VIP App, which can be downloaded free of charge. This function can be used locally via a Wi-Fi network or on portable devices using 3G (or higher) networks; automatic switching between Wi-Fi and 3G networks according to availability. In all cases, the gateway should be connected to an ASDL router or another device guaranteeing local Wi-Fi and mobile 3G connectivity. Depending on bandwidth limitations, the gateway can serve up to 15 appliances (including door entry monitors, smartphones, tablets and PCs) with 4 simultaneous audio/video streams. It also allows "intercom" communication between all of the 15 devices served. The gateway is equipped with 1 Ethernet port for ViP system riser input, 1 PoE port, 2 PoE ports (can be set to non-PoE) and 1 non-PoE port. It is also equipped with an input for the power supply. Dimensions: 70x90x62 mm (4 DIN modules).

1456B

MULTI-APARTMENT GATEWAY FOR VIP SYSTEM

Interface allowing the connection of a private local area network to the ViP system. 1 port for connection to part. 1440 and 4 ports for connection to the VIP monitor, and other network devices on the private network. Dimensions 70x90x62 mm (4 DIN modules).

USB KEY LICENCE FOR 1456B**MASTER LICENCE**

Code

1456B/M1	1 MASTER LICENCE FOR 1456B, VIP SYSTEM (USB KEY)
1456B/M10	10 MASTER LICENCES FOR 1456B, VIP SYSTEM (USB KEY)
1456B/M50	50 MASTER LICENCES FOR 1456B, VIP SYSTEM (USB KEY)
1456B/M100	100 MASTER LICENCES FOR 1456B, VIP SYSTEM (USB KEY)
1456B/M200	200 MASTER LICENCES FOR 1456B, VIP SYSTEM (USB KEY)

SLAVE LICENCE

Code

1456B/S1	1 SLAVE LICENCE FOR 1456B, VIP SYSTEM (USB-KEY)
1456B/S10	10 SLAVE LICENCES FOR 1456B, VIP SYSTEM (USB-KEY)
1456B/S50	50 SLAVE LICENCES FOR 1456B, VIP SYSTEM (USB-KEY)
1456B/S100	100 SLAVE LICENCES FOR 1456B, VIP SYSTEM (USB-KEY)
1456B/S200	200 SLAVE LICENCES FOR 1456B, VIP SYSTEM (USB-KEY)

PHONE LICENCE

Code

1456B/T1	1 PHONE LICENCE FOR 1456B, VIP SYSTEM (USB KEY)
1456B/T10	10 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)
1456B/T50	50 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)
1456B/T100	100 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)
1456B/T200	200 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)

USB KEY LICENCE
FOR 1456B



CATALOGUE SẢN PHẨM

PHỤ KIỆN

E-MAIL LICENCE
FOR 1456B

E-MAIL LICENTIE VOOR 1456B

MASTER LICENCE

Code

1456B/ME1	1 MASTER LICENCE FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/ME10	10 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/ME50	50 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/ME100	100 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/ME200	200 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)

SLAVE LICENCE

Code

1456B/SE1	1 MASTER LICENCE FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/SE10	10 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/SE50	50 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/SE100	100 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/SE200	200 MASTER LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)

PHONE LICENCE

Code

1456B/TE1	1 PHONE LICENCE FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/TE10	10 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/TE50	50 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/TE100	100 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)
1456B/TE200	200 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)



1456G

THIRD PARTY HOME AUTOMATION INTERFACE

Interface allowing the connection of third party Home Automation devices. 1 port for connection to part. 1440 and 4 ports for connection to the VIP monitor, and other network devices on the private network. Dimensions 70x90x62 mm (4 DIN modules).



1456S

APARTMENT SLAVE GATEWAY FOR VIP SYSTEM

Apartment gateway in slave version (requires presence of a door entry monitor). Allows the operation of door entry monitor system via tablets and smartphones using the Comelit ViP App, which can be downloaded free of charge. This function can be used locally via a Wi-Fi network or on portable devices using 3G (or higher) networks; automatic switching between Wi-Fi and 3G networks according to availability. In all cases, the gateway should be connected to an ASDL router or another device guaranteeing local Wi-Fi and mobile 3G connectivity. Depending on bandwidth limitations, the gateway can serve up to 15 appliances (including door entry monitors, smartphones, tablets and PCs) with 4 simultaneous audio/video streams. It also allows "intercom" communication between all of the 15 devices served. The gateway is equipped with 1 Ethernet port for VIP system riser input, 1 PoE port, 2 PoE ports (can be set to non-PoE) and 1 non-PoE port. It is also equipped with an input for the power supply. Dimensions: 70x90x62 mm (4 DIN modules).



1459

CALL LOG SERVER. VIP SYSTEM

Server device for VIP system that allows the recording, storage and playback of calls from external units. Complete with Call-Log administrator software for settings (IP address, date, time, enable audio, video or audio-video recording, recording duration and recording storage time) and recording filters (days of the week, external unit making the call, internal unit receiving the call). Compatible with Windows operating systems. 19 Vdc power supply. Equipped with power supply unit with 100-240 Vac 50/60 Hz input and 19 Vdc output. Dimensions: 190x190x55 mm.



1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

Power supply unit 110-230V input and 33Vdc 500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).



1596A

POWER SUPPLY UNIT 33 VDC 60W INPUT 110-240 VAC 316 ENTR. PAN

Power supply unit with 110-230V primary and 33Vdc 1.8A continuous output for 316 range entrance panels. Equipped with internal protection against current overload and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).





PHỤ KIỆN



- | | |
|------|--|
| 1952 | VIDEO CPS VIP
Desk mounted audio-video porter switchboard, with alphanumeric key pad and touch screen. Allows the visitor to be seen and the name or apartment number of the user being called to be displayed. Allows management of calls. Day/Night setting and intercom facility. 12V DC power supply with part. 43082 or directly from VIP network. Dimensions:193 x 223 x 65 mm |
|------|--|



- | | |
|-------|--|
| 3063D | MODULE W/8 BUTT.IN 2 ROWS+VIP FOR SING.-PLATE PAN.
Button management module. Works in conjunction with audio/video modules or audio module. Allows management of 8 buttons. Dimensions: 45x55x30 mm. |
|-------|--|



- | | |
|--------|--|
| SK9071 | SIMPLEKEY LIFT INTERFACE
To be connected to the VIP Actuator module part. 1443. 12 Vdc power supply. Allows one or more relay contacts to be activated through an interface for lift systems or other uses. Up to 10 SK9071 interfaces can be connected to each 1443, therefore up to 100 relay contacts. Dimensions: 140 x 95 x 55 mm (8 DIN modules) |
|--------|--|



- | | |
|---------|---|
| SW05SIP | LICENSE FOR INCREASING ART. 1456G BY 5 USERS
Software License for increasing the VOIP extensions addressed via ViP interface Art. 1456G by 5 units. |
|---------|---|

- | | |
|---------|---|
| SW10SIP | LICENSE FOR INCREASING ART. 1456G BY 10 USERS
Software License for increasing the VOIP extensions addressed via ViP interface Art. 1456G by 10 units. |
|---------|---|

- | | |
|---------|---|
| SW20SIP | LICENSE FOR INCREASING ART. 1456G BY 20 USERS
SW license for increasing the VOIP extensions (addressed via ViP interface Art. 1456G) by 20 units. |
|---------|---|



- | | |
|---------|---|
| SW50SIP | LICENSE FOR INCREASING ART. 1456G BY 50 USERS
SW license for increasing the VOIP extensions (addressed via ViP interface Art. 1456G) by 50 units. |
|---------|---|

- | | |
|----------|---|
| SW100SIP | LICENSE FOR INCREASING ART. 1456G BY 100 USERS
Software License for increasing the VOIP extensions addressed via ViP interface Art. 1456G by 100 units. |
|----------|---|



INDEX - 1 of 3

1172B	LED BULB FOR EXTERNAL UNITS	52
1218	NAME TAG SHEETS FOR IKALL ENTRANCE PANEL	56 - 60
1219	NAME TAG SHEETS FOR VANDALCOM ENTRANCE PANEL	52
1437	VIP SCAN PROTECTOR	62
1439	SERVER/CLIENT BRIDGE FOR VIP SYSTEM	62
1440	NETWORK SWITCH 4 PORT	62
1441	RISER POWER SUPPLY VIP 120W	62
1441A	VIP SYSTEM 120W RISER POWER SUPPLY UNIT	62
1441B	30W VIP SYSTEM POWER SUPPLY UNIT	62
1443	VIP SYSTEM RELAY ACTUATOR MODULE	62
1445H	VIP SYSTEM REMOTE CAMERA MODULE H264	62
1446H	VIP SYSTEM PAL OR NTSC VIDEO OUTPUT MODULE H264	62
1447	10/100MB ACTIVE REPEATER MODULE VIP	62
1448	SWITCHBOARD SOFTWARE FOR PC FOR VIP SYSTEM	62
1449	RJ45 ETHERNET CABLE, 4-POLE CONNECTION. LENGTH 2M	62
1450	VIP BARCODE READER FOR DEVICES	63
1451A	POE POWER SUPPLY UNIT FOR VIP SYSTEM MONITOR	63
1452	VIP REMOTE CONNECTION INTERFACE	63
1454	PC INTERCOM	63
1454K	LOCAL PC DOOR ENTRY MONITOR SOFTWARE VIP	63
1456	MASTER APARTMENT GATEWAY	63
1456B	MULTI-APARTMENT GATEWAY FOR VIP SYSTEM	63
1456B/M1	1 MASTER LICENSE FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/M10	10 MASTER LICENSES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/M100	100 MASTER LICENSES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/M200	200 MASTER LICENSES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/M50	50 MASTER LICENSES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/ME1	1 MASTER LICENSE FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/ME10	10 MASTER LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/ME100	100 MASTER LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/ME200	200 MASTER LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/ME50	50 MASTER LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/S1	1 SLAVE LICENSE FOR 1456B, VIP SYSTEM (USB-KEY)	63
1456B/S10	10 SLAVE LICENSES FOR 1456B, VIP SYSTEM (USB-KEY)	63
1456B/S100	100 SLAVE LICENSES FOR 1456B, VIP SYSTEM (USB-KEY)	63
1456B/S200	200 SLAVE LICENSES FOR 1456B, VIP SYSTEM (USB-KEY)	63
1456B/S50	50 SLAVE LICENSES FOR 1456B, VIP SYSTEM (USB-KEY)	63
1456B/SE1	1 SLAVE LICENSE FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/SE10	10 SLAVE LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/SE100	100 SLAVE LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/SE200	200 SLAVE LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64



1456B/SE50	50 SLAVE LICENSES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/T1	1 PHONE LICENCE FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/T10	10 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/T100	100 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/T200	200 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/T50	50 PHONE LICENCES FOR 1456B, VIP SYSTEM (USB KEY)	63
1456B/TE1	1 PHONE LICENCE FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/TE10	10 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/TE100	100 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/TE200	200 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456B/TE50	50 PHONE LICENCES FOR 1456B, VIP SYSTEM (E-MAIL)	64
1456G	THIRD PARTY HOME AUTOMATION INTERFACE	64
1456S	APARTMENT SLAVE GATEWAY FOR VIP SYSTEM	64
1459	CALL LOG SERVER. VIP SYSTEM	64
1595	33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL	47 - 52 - 56 - 60 - 64
1596A	POWER SUPPLY UNIT 33 VDC 60W INPUT 110-240 VAC 316 ENTR. PAN	46 - 64
1682	IKALL VIP AUDIO ONLY SPEAKER	52 - 55 - 60
1682HVC	IKALL SERIES AUDIO MOD. FOR REM.COL.CAM. VIP. H264	52 - 55 - 60
1952	VIDEO CPS VIP	65
2633	ELEGANCE DOOR-ENTRY PHONE, VIP SYSTEM. STYLE SERIES	44
3063D	MODULE W/8 BUTT.IN 2 ROWS+VIP FOR SING.-PLATE PAN.	65
3064S	4-BUTTON MODULE, VANDALCOM SERIES	51
3070S	DIGITAL CALL MODULE, VANDALCOM SERIES	51
3072S	DIGITAL DIRECTORY MODULE, VANDALCOM SERIES	51
3110/1	1 MODULE BACK BOX	53 - 56
3110/2	2 MODULE BACK BOX	53 - 56
3110/3	3 MODULE BACK BOX	53 - 56
3110/4	4 MODULE BACK BOX	53 - 56
31121	RAIN SHIELD FOR 1 MODULE ENTRANCE PANEL	53 - 57
31122	RAIN SHIELD FOR 2 MODULE ENTRANCE PANEL	53 - 57
31123	RAIN SHIELD FOR 3 MODULE ENTRANCE PANEL	53 - 57
31124L	IKALL RAIN SHIELD FOR 4 VERTICAL MODULES	53 - 57
31141	IKALL CORNICE FOR 1 MODULE PANEL	53 - 57
31142	IKALL CORNICE FOR 2 MODULE PANEL	53 - 57
31143	IKALL CORNICE FOR 3 MODULE PANEL	53 - 57
31144L	IKALL CORNICE FOR 4 VERTICAL MODULES	53 - 57
31161	IKALL 1 MODULE HOUSING WITH RAINSHIELD	53 - 57
31162	IKALL HOUSING WITH RAINSHIELD 2 MODULE	53 - 57
31163	IKALL HOUSING WITH RAINSHIELD 3 MODULE	53 - 57
31164L	IKALL HOUSING WITH RAINSHIELD 4 MODULE	53 - 57
3159/1	VANDALCOM SERIES STAINLESS STEEL SURFACE-MOUNTED HOUSING	50



INDEX - 2 of 3

3159/2	VANDALCOM SERIES STAINLESS STEEL SURFACE-MOUNTED HOUSING	50
3159/3	VANDALCOM SERIES STAINLESS STEEL SURFACE-MOUNTED HOUSING	50
3160/1	FLUSH-MOUNTED BOX FOR VANDALCOM ENTRANCE PANEL	50
3160/2	FLUSH-MOUNTED BOX FOR VANDALCOM ENTRANCE PANEL	50
3160/3	FLUSH-MOUNTED BOX FOR VANDALCOM ENTRANCE PANEL	50
3161/1	VANDALCOM SERIES FRAME. DARK GREY COLOUR	50
3161/1A	VANDALCOM SERIES FRAME. STEEL GREY COLOUR	50
3161/2	VANDALCOM SERIES FRAME. DARK GREY COLOUR	50
3161/2A	VANDALCOM SERIES FRAME. STEEL GREY COLOUR	50
3161/3	VANDALCOM SERIES FRAME. DARK GREY COLOUR	50
3161/3A	VANDALCOM SERIES FRAME. STEEL GREY COLOUR	50
3176S	STEEL BLANK MODULE, VANDALCOM SERIES	51
3179S	MODULE FOR SIMPLEKEY READER, VANDALCOM SERIES	51
3186S	INDICATION/NAMEPLATE MODULE, VANDALCOM SERIES	51
3188S	VANDALCOM ELECTRONIC KEY FOR PW AND IKALL UNITS	51
3201HXV	1 BUTTON FLUSH 316 ANALOG A/V PANEL VIP H264	48
3201XA	1 BUTTON FLUSH 316 ANALOG AUDIO PANEL VIP	47
3202HXV	2 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3202XA	2 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3203HXV	3 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3203XA	3 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3204HXV	4 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3204XA	4 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3205HXV	5 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3205XA	5 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3206HXV	6 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3206XA	6 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3207HXV	7 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3207XA	7 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3208HXV	8 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3208XA	8 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3209HXV	9 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3209XA	9 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3210HXV	10 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3210XA	10 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3211HXV	11 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3211XA	11 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3212HXV	12 BUTTONS FLUSH 316 ANALOG A/V PANEL VIP H264	48
3212XA	12 BUTTONS FLUSH 316 ANALOG AUDIO PANEL VIP	47
3262S/0	0-BUTTON MODULE FOR AUDIO UNITS	51
3262S/1	1-BUTTON MODULE FOR AUDIO UNITS	51
3262S/2	2-BUTTON MODULE FOR AUDIO UNITS	51



3268S/0	0-BUTTON MODULE FOR A/V UNITS	51
3268S/1	1-BUTTON MODULE FOR A/V UNITS	51
3268S/2	2-BUTTON MODULE FOR A/V UNITS	51
3311/1A	MODULE-HOLDER FRAME COMPLETE WITH FINISHING CORNICE	53 - 56
3311/1AL	1 MODULE SURROUND WITH ANODISED ALUMINIUM FRAME	56
3311/1S	IKALL SERIES 1-MODULE HOLDER FRAME W/ SILVER FINISHING FRAME	53 - 56
3311/1W	IKALL SERIES 1-MODULE HOLDER FRAME W/ WHITE FINISHING FRAME	53 - 56
3311/2A	MODULE-HOLDER FRAME COMPLETE WITH FINISHING CORNICE	53 - 56
3311/2AL	2 MODULE SURROUND WITH ANODISED ALUMINIUM FRAME	56
3311/2S	IKALL SERIES 2-MODULE HOLDER FRAME W/ SILVER FINISHING FRAME	53 - 56
3311/2W	IKALL SERIES 2-MODULE HOLDER FRAME W/ WHITE FINISHING FRAME	53 - 56
3311/3A	MODULE-HOLDER FRAME COMPLETE WITH FINISHING CORNICE	53 - 56
3311/3AL	3 MODULE SURROUND WITH ANODISED ALUMINIUM FRAME	56
3311/3S	IKALL SERIES 3-MODULE HOLDER FRAME W/ SILVER FINISHING FRAME	53 - 56
3311/3W	IKALL SERIES 3-MODULE HOLDER FRAME W/ WHITE FINISHING FRAME	53 - 56
3311/4A	MODULE-HOLDER FRAME COMPLETE WITH FINISHING CORNICE	53 - 56
3311/4AL	4 MODULE SURROUND WITH ANODISED ALUMINIUM FRAME	56
3311/4S	IKALL SERIES 4-MODULE HOLDER FRAME W/ SILVER FINISHING FRAME	53 - 56
3311/4W	IKALL SERIES 4-MODULE HOLDER FRAME W/ WHITE FINISHING FRAME	53 - 56
3334	PLAIN MODULE WITH BLACK FACEPLATE	59
3334M	IKALL METAL BLANK MODULE	55
3336	LIT MODULE. IKALL SERIES. SB SYSTEM	59
3336M	IKALL METAL INDICATOR MODULE	55
3339M	IKALL METAL NAME PLATE	55
33400	ZERO-BUTTON AUDIO MODULE WITH BLACK FACEPLATE	57
33400M	IKALL METAL AUDIO MODULE - 0 BUTTONS	54
33401	IKALL AUDIO MODULE - 1 BUTTON	58
33401A	IKALL SERIES 1-BUTTON MODULE FOR AUDIO UNIT - METAL	58
33401M	IKALL METAL AUDIO MODULE - 1 BUTTON	54
33402	IKALL AUDIO MODULE - 2 BUTTONS	58
33402A	IKALL METAL AUDIO MODULE - 2 BUTTONS	58
33402M	IKALL METAL AUDIO MODULE - 2 BUTTONS	54
33410	IKALL VIDEO MODULE - 0 BUTTONS	58
33410M	IKALL METAL VIDEO MODULE - 0 BUTTONS	54
33411	IKALL VIDEO MODULE - 1 BUTTON	58
33411A	IKALL SERIES 1-BUTTON MODULE FOR AUDIO/VIDEO UNIT - METAL	58
33411M	IKALL METAL VIDEO MODULE - 1 BUTTON	54
33412	IKALL VIDEO MODULE - 2 BUTTONS	58
33412A	IKALL SERIES 2-BUTTON MODULE FOR AUDIO/VIDEO UNIT - METAL	59
33412M	IKALL METAL VIDEO MODULE - 2 BUTTONS	54
33433	IKALL SIMPLEBUS 3 BUTTON MODULE	59
33433M	IKALL METAL SB2 3 BUTTON MODULE	54



INDEX - 3 of 3

33434	IKALL SIMPLEBUS 4 BUTTON MODULE	59
33434M	IKALL METAL SB2 4 BUTTON MODULE	55
33436	IKALL SIMPLEBUS 6 BUTTON MODULE	59
33436M	IKALL METAL SB2 6 BUTTON MODULE	55
3348	IKALL CODED ACCESS MODULE	59
3348M	IKALL METAL CODED ACCESS MODULE	55
3349	IKALL SIMPLEKEY CUT-OUT	59
3349M	IKALL METAL SIMPLEKEY CUT-OUT	55
3360B	2-WIRE AND VIP CALL MODULE. IKALL SERIES	60
3360BM	2-WIRE AND VIP CALL MODULE. IKALL METAL	55
3452	DIGITAL CAP SENS STAINLESS STEEL A/V ENTRANCE PANEL – VIP	47
3454H	VIP 316 TOUCH A/V ENTRANCE PANEL. H264	46
3458	ACCESS CONTROL ACCESSORY MODULE FOR EXTERNAL UNITS, 316	48
3459	RAINSIELD WITH LEDS FOR 316 SENSE ST. STEEL ENT. PANEL	47
3460/12	FLUSH-MOUNTED BOX FOR 10-11-12-BUTTON ENT.PANELS. 316 SERIES	48
3460/2	FLUSH-MOUNTED BOX FOR 1- AND 2-BUTTON ENT.PANELS. 316 SERIES	48
3460/4	FLUSH-MOUNTED BOX FOR 3- AND 4-BUTTON ENT.PANELS. 316 SERIES	48
3460/6	FLUSH-MT.BOX FOR TOUCH-SENSE & 5-6 BUTT.ENT.PAN. 316 SERIES	48
3460/9	FLUSH-MOUNTED BOX FOR 7-8-9-BUTTON ENT. PANELS. 316 SERIES	48
3460EA	AUDIO ENTRANCE PANEL FOR EMERGENCY CALLS. VIP SYSTEM	61
3460HA	AUDIO HELP POINT PUSHBUTTON ENTRANCE PANEL. VIP SYSTEM	61
3460HEV	VIDEO ENT. PANEL FOR EMERGENCY CALLS. VIP SYSTEM. H264	61
3460HHV	VIDEO HELP POINT ENTRANCE PANEL. VIP SYSTEM H264	61
3461	WALL HOUSING FOR EMERGENCY AND HELP POINT PANELS	61
3462/2	WALL-MOUNTED HOUSING SERIES 316 1 & 2 BUT. PANEL	48
3462/4	WALL-MOUNTED HOUSING SERIES 316 3 & 4 BUT. PANEL	48
3462/6	WALL HOUSING FOR TOUCH-SENSE & 5-6 BUTT.ENT.PAN. 316 SERIES	48
3472	SENSE MODULE VIP SYSTEM ARCHITECTUS-PRO	49
3474	TOUCH MODULE VIP SYSTEM ARCHITECTUS-PRO	49
3476	MODULE A/V VIP SYSTEM ARCHITECTUS-PRO	49
3478	MODULE AUDIO VIP SYSTEM ARCHITECTUS-PRO	49
3479	MODULE FOR SIMPLEKEY READER ARCHITECTUS-PRO	49
3481	MODULE 1 BUTTON SB/VIP BLANK NAMEPLATE ARCHITECTUS-PRO	49
3482	MODULE 2 BUTTON SB/VIP BLANK NAMEPLATE ARCHITECTUS-PRO	49
3483	MODULE 3 BUTTON SB/VIP BLANK NAMEPLATE ARCHITECTUS-PRO	50
3484	MODULE 4 BUTTON SB/VIP BLANK NAMEPLATE ARCHITECTUS-PRO	50
3489	CUSTOMISED NAMEPLATE ARCHITECTUS-PRO	50
3639/1	PILLAR FOR ENTRANCE PANEL, HEIGHT 170 CM	54 - 57
3639/2	PILLAR FOR ENTRANCE PANEL, HEIGHT 170 CM	54 - 57
3639/3	PILLAR FOR ENTRANCE PANEL, HEIGHT 170 CM	54 - 57
3640/1	PILLAR FOR ENTRANCE PANEL, HEIGHT 117 CM	54 - 57
3640/2	PILLAR FOR ENTRANCE PANEL, HEIGHT 117 CM	54 - 57



3640/3	PILLAR FOR ENTRANCE PANEL, HEIGHT 117 CM	54 - 57
3649/1	1 MODULE 45° ANGLED ENTRANCE PANEL HOUSING	54 - 57
3649/2	2 MODULE 45° ANGLED ENTRANCE PANEL HOUSING	54 - 57
3649/3	3 MODULE 45° ANGLED ENTRANCE PANEL HOUSING	54 - 57
4682HC	COL.AUD/VID UNIT FOR VIP SYST., IKALL SERIES.H264	52 - 56 - 60
4682HCW	D&N WIDE COL.A/V UNIT. VIP SYS. IKALL SERIES. H264	52 - 56 - 60
4682HKC	COLOUR A/V UNIT FOR VIP SYSTEM, IKALL SERIES. H264	42
4894E	EASYCALL INTERNAL 1 BUTTON ENTRANCE PANEL FOR VIP SYSTEM	61
4894HIM	EXTERNAL UNIT FOR VIP KIT - IKALL METAL H264	42
6117	PLANUX, SMART, ICONA FLUSH BACKBOX	45
6118	PLANUX CLIPS FOR DRY LINED WALLS	45
6203B	EASYCOM VIP UNIT - BLACK	43
6203W	EASYCOM VIP UNIT - WHITE	43
6602W	ICONA SERIES HANDS-FREE COLOUR MONITOR. VIP SYSTEM. H264	45
6612	DESK BASE FOR ICONA MONITOR	45
6620	WALL BRACKET FOR ICONA MONITOR	45
6802W	MAXI SERIES 7" MONITOR. VIP SYSTEM	44
6812	DESK BASE FOR MAXI MONITOR	44
6817	FLUSH-MOUNTED BOX FOR MAXI MONITOR	44
6820	SBC & VIP MAXI MONITOR WALL SUPPORT	44
8501HIM	SING.-FAMILY KIT W/ IKALL METAL & PC INTERCOM VIP H264 SYST.	42
8504H	SING.-FMLY KIT W/VANDALCOM & PC INTERCOM VIP SYST. KIT H264	42
8513HIM	SINGLE-FAMILY KIT W/IKALL METAL AND MASTER GATEWAY. VIP H264	41
8521	IKALL METAL AND ICONA KIT.VIP H264 SYSTEM	41
8522	2-FAMILY IKALL AND VIP ICONA H264 KIT	41
8531	IKALL METAL AND ICONA KIT, GATEWAY SLAVE. H264	41
SK9001I	SIMPLEKEY ADVANCED READER IKALL	52
SK9071	SIMPLEKEY LIFT INTERFACE	65
SW05SIP	LICENSE FOR INCREASING ART. 1456G BY 5 USERS	65
SW100SIP	LICENSE FOR INCREASING ART. 1456G BY 100 USERS	65
SW10SIP	LICENSE FOR INCREASING ART. 1456G BY 10 USERS	65
SW20SIP	LICENSE FOR INCREASING ART. 1456G BY 20 USERS	65
SW50SIP	LICENSE FOR INCREASING ART. 1456G BY 50 USERS	65

**[IT] Comelit Group Spa**

Via Don Arrigoni 5
24020 Rovetta S. Lorenzo
Bergamo Italy
Tel. +39 (0) 346 750011
Fax +39 (0) 346 71436
www.comelitgroup.com
info@comelit.it

[AU] Comelit Australia Pty Ltd

Unit 6/11 Sabre Drive
Port Melbourne
Victoria 3207
Ph. 1300 889000
enquiries@comelitgroup.com.au

[NL] Comelit Nederland BV

Buitendijks 1-3356 LX Papendrecht
Tel. +31 786511201
Fax +31 786170955
www.comelit.nl
info@comelit.nl

[BE] Comelit Group Belgium

Kleinewinkellan 24
1853 Grimbergen
Belgium
Tel. +32 2 411 50 99
Fax. +32 2 411 50 97
www.comelit.be
info@comelit.be

[SG] Comelit South East Asia Pte Ltd

Oxley Bizhub1 Blk 69,
Ubi Road 1, #05-27
408731 Singapore
Tel. +6567024780
www.comelit.sg
office@comelit.sg

[CO] Comelit Colombia

Carrera 76#73-44, 2° piso Bogotá,
Colombia
Tel.: (57-1) 4929358/79686
james.quimbaya@comelit.it
www.comelit.com.co

[AE] Comelit Middle East

Office 1-154, Techno Hub
Dubai Silicon Oasis
Free zone - Dubai, UAE
www.comelit.ae
info@comelit.ae

[DE] Comelit Group S.p.A. Deutschland

Konrad-Zuse-Ring 12c
41179 Mönchengladbach
Deutschland
tel. 02161/54959-0
fax: 02161/54959-10
info@comelit.de

[GB] Comelit Group UK Ltd

Unit 4 Mallow Park Watchmead
Welwyn Garden City Herts
AL7 1GX
Tel: +44 (0)1707377203
Fax: +44 (0)1707377204
www.comelitgroup.co.uk
info@comelitgroup.co.uk

[ES] Comelit Group Spa

Sucursal en Espana
Calle Pintor Roig i Soler, 28
08916 - Badalona (Barcelona)
Tel. +34 932 430 376
Fax +34 934 084 683
www.comelit.es
info@comelit.es

[US] Comelit Usa

2021 S. Myrtle Avenue
Monrovia, CA 91016
Tel. +1 626 930 0388
Fax +1 626 930 0488
www.comelitusa.com
sales@comelitusa.com

[FR] Comelit Immotec

18, rue Séjourné
94000 CRETEIL CEDEX
Tél. +33 (0) 1 43 53 97 97
Fax +33 (0) 1 43 53 97 87
www.comelit.fr
contact@comelit-immotec.fr

[RU] Comelit Group Russia

Moscow,
Krasnogvardeiskiy bulvar, 7A
tel: +7(495)789-49-33
www.comelit.ru
mail: tsn@comelit.ru
mail: info@comelit.ru

[GR] Comelit Hellas

Telergo Security Ltd
Roumelis, 59
16451 Argiroupoli - Athens Greece
Tel. +30 210 99 68 605-6
Fax +30 210 99 45 560
www.comelit.gr
telergo@otenet.gr

[HK] Comelit Hong Kong

Representative Office
Rm 601, 6/F, Tung Hip
Commercial Building,
248 Dex Voeux Road Central,
Sheung Wan, Hong Kong
Office direct line:
+852 3582 1632
www.comelit.hk
info@comelit.hk

[IE] Comelit Ireland

Ground Floor
14 Herbert Street - Dublin 2
Tel. +353 (0) 1 619 0204
Fax +353 (0) 1 619 0298
www.comelit.ie
info@comelit.ie